VISIT…

Math into LaTeX

An Introduction to LaTeX and $\mathcal{AMS}$-LaTeX

This book is dedicated to those who worked so hard
and for so long to bring these important tools to us:

The LaTeX3 team
and in particular
Frank Mittelbach (project leader) and David Carlisle

The $\mathcal{AMS}$ team
and in particular
Michael J. Downes (project leader) and David M. Jones

George Grätzer

Math into LaTeX

An Introduction to LaTeX and AMS-LaTeX

BIRKHÄUSER
BOSTON • BASEL • BERLIN

George Grätzer
Department of Mathematics
University of Manitoba
Winnipeg, Manitoba
Canada R3T 2N2

Library of Congress Cataloging-in-Publication Data

Grätzer, George A.
Math into LaTeX : an introduction to LaTeX and AMS-LaTeX /
George Grätzer
p. cm.
Includes index.
ISBN 0-8176-3805-9 (acid-free paper) (pbk. : alk. paper)
1. AMS-LaTeX. 2. Mathematics printing–Computer programs.
3. Computerized typesetting. I. Title.
Z253.4A65G69 1995 95-36881
688.2′2544536–dc20 CIP

Printed on acid-free paper
© Birkhäuser Boston 1996

All rights reserved.

Typeset by the Author in LaTeX
Design, layout, and typography by Mery Sawdey, Minneapolis, MN

Short contents

Preface xviii

Introduction xix

I A short course 1

1 Typing your first article 3

II Text and math 59

2 Typing text 61

3 Text environments 111

4 Typing math 140

5 Multiline math displays 180

III Document structure 209

6 LaTeX documents 211

7 Standard LaTeX document classes 235

8 AMS-LaTeX documents 243

IV Customizing 265

9 Customizing LaTeX 267

V Long bibliographies and indexes 309

10 BibTeX 311

11 *MakeIndex* 332

A Math symbol tables 345

B Text symbol tables 356

C The $\mathcal{AMS}$-LaTeX sample article 360

D Sample article with user-defined commands 372

E Background 379

F PostScript fonts 387

G Getting it 392

H Conversions 402

I Final word 410

Bibliography 413

Afterword 416

Index 419

Contents

Preface xviii

Introduction xix
Typographical conventions xxvi

I A short course 1

1 Typing your first article 3
1.1 Typing a very short “article” 4
1.1.1 The keyboard 4
1.1.2 Your first note 5
1.1.3 Lines too wide 7
1.1.4 More text features 9
1.2 Typing math 10
1.2.1 The keyboard 10
1.2.2 A note with math 10
1.2.3 Building blocks of a formula 14
1.2.4 Building a formula step-by-step 20
1.3 Formula gallery 22
1.4 Typing equations and aligned formulas 29
1.4.1 Equations 29
1.4.2 Aligned formulas 31
1.5 The anatomy of an article 33
1.5.1 The typeset article 38
1.6 Article templates 41
1.7 Your first article 42
1.7.1 Editing the top matter 42

1.7.2 Sectioning . . . 43
1.7.3 Invoking proclamations . . . 44
1.7.4 Inserting references . . . 44
1.8 LaTeX error messages . . . 46
1.9 Logical and visual design . . . 48
1.10 A brief overview . . . 51
1.11 Using LaTeX . . . 52
1.11.1 $\mathcal{A}_{\mathcal{M}}\mathcal{S}$-LaTeX revisited . . . 52
1.11.2 Interactive LaTeX . . . 54
1.11.3 Files . . . 54
1.11.4 Versions . . . 55
1.12 What's next? . . . 56

II Text and math 59

2 Typing text 61
2.1 The keyboard . . . 62
2.1.1 The basic keys . . . 62
2.1.2 Special keys . . . 63
2.1.3 Prohibited keys . . . 63
2.2 Words, sentences, and paragraphs . . . 64
2.2.1 The spacing rules . . . 64
2.2.2 The period . . . 66
2.3 Instructing LaTeX . . . 67
2.3.1 Commands and environments . . . 67
2.3.2 Scope . . . 70
2.3.3 Types of commands . . . 72
2.4 Symbols not on the keyboard . . . 73
2.4.1 Quotes . . . 73
2.4.2 Dashes . . . 73
2.4.3 Ties or nonbreakable spaces . . . 74
2.4.4 Special characters . . . 74
2.4.5 Ligatures . . . 75
2.4.6 Accents and symbols in text . . . 75
2.4.7 Logos and numbers . . . 76
2.4.8 Hyphenation . . . 78
2.5 Commenting out . . . 81
2.6 Changing font characteristics . . . 83
2.6.1 The basic font characteristics . . . 83
2.6.2 The document font families . . . 84
2.6.3 Command pairs . . . 85
2.6.4 Shape commands . . . 85

2.6.5 Italic correction . . . 86
2.6.6 Two-letter commands . . . 87
2.6.7 Series . . . 88
2.6.8 Size changes . . . 88
2.6.9 Orthogonality . . . 89
2.6.10 Boxed text . . . 89
2.7 Lines, paragraphs, and pages . . . 90
2.7.1 Lines . . . 90
2.7.2 Paragraphs . . . 93
2.7.3 Pages . . . 94
2.7.4 Multicolumn printing . . . 95
2.8 Spaces . . . 96
2.8.1 Horizontal spaces . . . 96
2.8.2 Vertical spaces . . . 97
2.8.3 Relative spaces . . . 99
2.8.4 Expanding spaces . . . 99
2.9 Boxes . . . 100
2.9.1 Line boxes . . . 100
2.9.2 Paragraph boxes . . . 103
2.9.3 Marginal comments . . . 104
2.9.4 Solid boxes . . . 105
2.9.5 Fine-tuning boxes . . . 106
2.10 Footnotes . . . 107
2.10.1 Fragile commands . . . 107
2.11 Splitting up the file . . . 108
2.11.1 Input and include . . . 108
2.11.2 Combining files . . . 109

3 Text environments 111
3.1 List environments . . . 112
3.1.1 Numbered lists: `enumerate` . . . 112
3.1.2 Bulleted lists: `itemize` . . . 112
3.1.3 Captioned lists: `description` . . . 113
3.1.4 Rule and combinations . . . 114
3.2 Tabbing environment . . . 116
3.3 Miscellaneous displayed text environments . . . 118
3.4 Proclamations (theorem-like structures) . . . 123
3.4.1 The full syntax . . . 127
3.4.2 Proclamations with style . . . 127
3.5 Proof environment . . . 130
3.6 Some general rules for displayed text environments . . . 131
3.7 Tabular environment . . . 132

3.8 Style and size environments 138

4 Typing math 140
4.1 Math environments 141
4.2 The spacing rules 143
4.3 The equation environment 144
4.4 Basic constructs 146
4.4.1 Arithmetic 146
4.4.2 Subscripts and superscripts 147
4.4.3 Roots 148
4.4.4 Binomial coefficients 149
4.4.5 Integrals 149
4.4.6 Ellipses 150
4.5 Text in math 151
4.6 Delimiters 152
4.6.1 Delimiter tables 153
4.6.2 Delimiters of fixed size 153
4.6.3 Delimiters of variable size 154
4.6.4 Delimiters as binary relations 155
4.7 Operators 155
4.7.1 Operator tables 156
4.7.2 Declaring operators 157
4.7.3 Congruences 158
4.8 Sums and products 159
4.8.1 Large operators 159
4.8.2 Multiline subscripts and superscripts 160
4.9 Math accents 161
4.10 Horizontal lines that stretch 162
4.10.1 Horizontal braces 162
4.10.2 Over and underlines 163
4.10.3 Stretchable arrow math symbols 164
4.11 The spacing of symbols 164
4.12 Building new symbols 166
4.12.1 Stacking symbols 167
4.12.2 Declaring the type 168
4.13 Vertical spacing 169
4.14 Math alphabets and symbols 170
4.14.1 Math alphabets 171
4.14.2 Math alphabets of symbols 172
4.14.3 Bold math symbols 173
4.14.4 Size changes 175
4.14.5 Continued fractions 175

4.15 Tagging and grouping 176
4.16 Generalized fractions 178
4.17 Boxed formulas 179

5 Multiline math displays 180
5.1 Gathering formulas 181
5.2 Splitting a long formula 182
5.3 Some general rules 184
5.3.1 The subformula rule 185
5.3.2 Group numbering 186
5.4 Aligned columns 187
5.4.1 The subformula rule revisited 188
5.4.2 Align variants 189
5.4.3 Intertext 192
5.5 Aligned subsidiary math environments 193
5.5.1 Subsidiary variants of aligned math environments 193
5.5.2 Split 195
5.6 Adjusted columns 198
5.6.1 Matrices 198
5.6.2 Arrays 201
5.6.3 Cases 203
5.7 Commutative diagrams 204
5.8 Pagebreak 205

III Document structure 209

6 LaTeX documents 211
6.1 The structure of a document 212
6.2 The preamble 213
6.3 Front matter 214
6.3.1 Abstract 214
6.3.2 Table of contents 215
6.4 Main matter 217
6.4.1 Sectioning 217
6.4.2 Cross-referencing 220
6.4.3 Tables and figures 223
6.5 Back matter 227
6.5.1 Bibliography in an article 227
6.5.2 Index 231
6.6 Page style 232

7 Standard LaTeX document classes 235
7.1 The article, report, and book document classes 235
7.1.1 More on sectioning 236
7.1.2 Options 237
7.2 The letter document class 239
7.3 The LaTeX distribution 240
7.3.1 Tools 241

8 AMS-LaTeX documents 243
8.1 The three AMS document classes 243
8.1.1 Font size commands 244
8.2 The top matter 244
8.2.1 Article info 245
8.2.2 Author info 246
8.2.3 AMS info 249
8.2.4 Multiple authors 250
8.2.5 Examples 250
8.3 AMS article template 253
8.4 Options 257
8.4.1 Math options 260
8.5 The AMS-LaTeX packages 261

IV Customizing 265

9 Customizing LaTeX 267
9.1 User-defined commands 268
9.1.1 Commands as shorthand 268
9.1.2 Arguments 271
9.1.3 Redefining commands 274
9.1.4 Optional arguments 275
9.1.5 Redefining names 276
9.1.6 Showing the meaning of commands 276
9.2 User-defined environments 279
9.2.1 Short arguments 282
9.3 Numbering and measuring 282
9.3.1 Counters 283
9.3.2 Length commands 287
9.4 Delimited commands 290
9.5 A custom command file 292
9.6 Custom lists 297
9.6.1 Length commands for the list environment 297
9.6.2 The list environment 299

9.6.3 Two complete examples 301
9.6.4 The `trivlist` environment 304
9.7 Custom formats 304

V Long bibliographies and indexes 309

10 BIBTEX 311
10.1 The database 311
10.1.1 Entry types 312
10.1.2 Articles 315
10.1.3 Books 316
10.1.4 Conference proceedings and collections 317
10.1.5 Theses 319
10.1.6 Technical reports 320
10.1.7 Manuscripts 321
10.1.8 Other entry types 321
10.1.9 Abbreviations 322
10.2 Using BIBTEX 323
10.2.1 The sample files 323
10.2.2 The setup 325
10.2.3 The four steps of BIBTEXing 325
10.2.4 The files of BIBTEX 327
10.2.5 BIBTEX rules and messages 329
10.2.6 Concluding comments 331

11 *MakeIndex* 332
11.1 Preparing the document 332
11.2 Index entries 335
11.3 Processing the index entries 339
11.4 Rules 342
11.5 Glossary 344

A Math symbol tables 345

B Text symbol tables 356

C The $\mathcal{AMS}$-LATEX sample article 360

D Sample article with user-defined commands 372

E Background 379
E.1 A short history . . . 379
E.1.1 The first interim solution . . . 381
E.1.2 The second interim solution . . . 382
E.2 How does it work? . . . 382
E.2.1 The layers . . . 382
E.2.2 Typesetting . . . 383
E.2.3 Viewing and printing . . . 384
E.2.4 The files of LaTeX . . . 385

F PostScript fonts 387
F.1 The Times font and MathTıme . . . 387
F.2 LucidaBright fonts . . . 390

G Getting it 392
G.1 Getting TeX . . . 392
G.2 Where to get it? . . . 393
G.3 Getting ready . . . 395
G.4 Transferring files . . . 396
G.5 More advanced file transfer commands . . . 398
G.6 The sample files . . . 400
G.7 $\mathcal{AMS}$ and the user groups . . . 400

H Conversions 402
H.1 From Plain TeX . . . 402
H.1.1 TeX code in LaTeX . . . 403
H.2 From LaTeX . . . 403
H.2.1 Version 2e . . . 404
H.2.2 Version 2.09 . . . 404
H.2.3 The LaTeX symbols . . . 405
H.3 From $\mathcal{AMS}$-TeX . . . 405
H.4 From $\mathcal{AMS}$-LaTeX version 1.1 . . . 406

I Final word 410
I.1 What was left out? . . . 410
I.1.1 Omitted from LaTeX . . . 410
I.1.2 Omitted from TeX . . . 411
I.2 Further reading . . . 411

Bibliography 413

Afterword 416

Index 419

List of tables

2.1 Special characters 74
2.2 Font table for Computer Modern typewriter style font 76
2.3 European accents 76
2.4 Extra text symbols 77
2.5 European characters 77
2.6 Font family switching commands 85

3.1 Tabular table 133
3.2 Floating table with `\multicolumn` 136
3.3 Tabular table with `\multicolumn` and `\cline` 137

4.1 Standard delimiters 153
4.2 Arrow delimiters 153
4.3 Operators without limits 157
4.4 Operators with limits 157
4.5 Congruences 158
4.6 Large operators 159
4.7 Math accents 161
4.8 Spacing commands 165

9.1 Table of redefinable names in LaTeX 277
9.2 Standard LaTeX counters 283

A.1 Hebrew letters 345
A.2 Greek characters 346
A.3 LaTeX binary relations 347
A.4 $\mathcal{AMS}$ binary relations 348
A.5 $\mathcal{AMS}$ negated binary relations 349

A.6 Binary operations 350
A.7 Arrows 351
A.8 Miscellaneous symbols 352
A.9 Math spacing commands 353
A.10 Delimiters 353
A.11 Operators 354
A.12 Math accents 355
A.13 Math font commands 355

B.1 Special text characters 356
B.2 Text accents 357
B.3 Some European characters 357
B.4 Extra text symbols 357
B.5 Text spacing commands 358
B.6 Text font commands 358
B.7 Font size changes 359
B.8 $\mathcal{AMS}$ font size changes 359

F.1 Lower font table for the Times font 389
F.2 Upper font table for the Times font 389

G.1 Some UNIX commands 395
G.2 Some `ftp` commands 396

H.1 TEX commands to avoid in LATEX 404
H.2 A translation table 405
H.3 $\mathcal{AMS}$-TEX style commands dropped in $\mathcal{AMS}$-LATEX 407
H.4 $\mathcal{AMS}$-TEX commands to avoid 408

List of figures

1.1 A schematic view of an article 34
1.2 The structure of LaTeX 51
1.3 Using LaTeX 53

6.1 The structure of a document 212
6.2 Sectioning commands in the `article` document class 219
6.3 Sectioning commands in the `amsart` document class 219
6.4 Page layout for the `article` document class 233

8.1 `fleqn` and `reqno` options for equations 258
8.2 Top-or-bottom tags option for `split` 258
8.3 $\mathcal{AMS}$-LaTeX package and document class interdependency 263

9.1 The layout of a custom list 298

10.1 Using BibTeX, Step 2 326
10.2 Using BibTeX, Step 3 326

11.1 A sample index 335
11.2 Using *MakeIndex*, Step 1 340
11.3 Using *MakeIndex*, Step 2 340

Preface

It is indeed a lucky author who is given the opportunity to completely rewrite a book barely a year after its publication. Writing about software affords such opportunities (especially if the original edition sold out), since the author is shooting at a moving target.

LaTeX and $\mathcal{A}_{\mathcal{M}}\mathcal{S}$-LaTeX improved dramatically with the release of the new standard LaTeX (called LaTeX 2_ε) in June of 1994 and the revision of $\mathcal{A}_{\mathcal{M}}\mathcal{S}$-LaTeX (version 1.2) in February of 1995. The change in $\mathcal{A}_{\mathcal{M}}\mathcal{S}$-LaTeX is profound. LaTeX 2_ε made it possible for $\mathcal{A}_{\mathcal{M}}\mathcal{S}$-LaTeX to join the LaTeX world. One of the main points of the present book is to make this clear. This book introduces LaTeX as a tool for mathematical typesetting, and treats $\mathcal{A}_{\mathcal{M}}\mathcal{S}$-LaTeX as a set of enhancements to the standard LaTeX, to be used in conjunction with hundreds of other LaTeX 2_ε enhancements.

I am not a TeX expert. Learning the mysteries of the system has given me great respect for those who crafted it: Donald Knuth, Leslie Lamport, Michael Spivak, and others did the original work; David Carlisle, Michael J. Downes, David M. Jones, Frank Mittelbach, Rainer Schöpf, and many others built on the work of these pioneers to create the new LaTeX and $\mathcal{A}_{\mathcal{M}}\mathcal{S}$-LaTeX.

Many of these experts and a multitude of others helped me while I was writing this book. I would like to express my deepest appreciation and heartfelt thanks to all who gave their time so generously. Their story is told in the Afterword.

Of course, the responsibility is mine for all the mistakes remaining in the book. Please send corrections—and suggestions for improvements—to me at the following address:

Department of Mathematics
University of Manitoba
Winnipeg MB, R3T 2N2
Canada
e-mail: George_Gratzer@umanitoba.ca

Introduction

Is this book for you?

This book is for the mathematician, engineer, scientist, or technical typist who wants to write and typeset articles containing mathematical formulas but does not want to spend much time learning how to do it.

I assume you are set up to use LaTeX, and you know how to use an editor to type a document, such as:

```
\documentclass{article}
\begin{document}
The square root of two: $\sqrt{2}$.  I can type math!
\end{document}
```

I also assume you know how to typeset a document, such as this example, with LaTeX to get the printed version:

The square root of two: $\sqrt{2}$. I can type math!

and you can view and print the typeset document.

And what do I promise to deliver? I hope to provide you with a solid foundation in LaTeX, the $\mathcal{AMS}$ enhancements, and some standard LaTeX enhancements, so typing a mathematical document will become second nature to you.

How to read this book?

Part I gives a short course in LaTeX. Read it, work through the examples, and you are ready to type your first paper. Later, at your leisure, read the other parts to become more proficient.

The rest of this section introduces TEX, LATEX, and $\mathcal{AMS}$-LATEX, and then outlines what is in this book. If you already know that you want to use LATEX to typeset math, you may choose to skip it.

TEX, LATEX, and $\mathcal{AMS}$-LATEX

TEX is a typesetting language created by Donald E. Knuth; it has extensive capabilities to typeset math. LATEX is an extension of TEX designed by Leslie Lamport; its major features include

- a strong focus on document structure and the logical markup of text;
- automatic numbering and cross-referencing.

$\mathcal{AMS}$-LATEX distills the decades-long experience of the American Mathematical Society ($\mathcal{AMS}$) in publishing mathematical journals and books; it *adds to* LATEX a host of features related to mathematical typesetting, especially the typesetting of multiline formulas and the production of finely-tuned printed output.

Articles written in LATEX (and $\mathcal{AMS}$-LATEX) are accepted for publication by an increasing number of journals, including all the journals of the $\mathcal{AMS}$.

Look at the typeset sample articles: `sampart.tex` (in Appendix C, on pages 361–363) and `intrart.tex` (on pages 39–40). You can begin creating such high-quality typeset articles after completing Part I.

What is document markup?

Most word processing programs are WYSIWYG (what you see is what you get); as you work, the text on the computer monitor is shown, more or less, as it'll look when printed. Different fonts, font sizes, italics, and bold face are all shown.

A different approach is taken by a *markup language*. It works with a text editor, an editing program that shows the text, the *source file*, on the computer monitor with only one font, in one size and shape. To indicate that you wish to change the font in the printed copy in some way, you must "mark up" the source file. For instance, to typeset the phrase "`Small Caps`" in small caps, you type

```
\textsc{Small Caps}
```

The `\textsc` command is a markup command, and the printed output is

SMALL CAPS

TEX is a markup language; LATEX is another markup language, an extension of TEX. Actually, it's quite easy to learn how to mark up text. For another example, look at the abstract of the `sampart.tex` sample article (page 364), and the instruction

```
\emph{complete-simple distributive lattices}
```

to emphasize the phrase "`complete-simple distributive lattices`", which when typeset looks like

complete-simple distributive lattices

On pages 364–371 we show the source file and the typeset version of the `sampart.tex` sample article together. The markup in the source file may appear somewhat bewildering at first, especially if you have previously worked on a WYSIWYG word processor. The typeset article is a rather pleasing-to-the-eye polished version of that same marked up material.[1]

TEX

TEX has excellent typesetting capabilities. It deals with mathematical formulas as well as text. To get $\sqrt{a^2 + b^2}$ in a formula, type `\sqrt{a^{2} + b^{2}}`. There is no need to worry about how to construct the square root symbol that covers $a^2 + b^2$.

A tremendous appeal of the TEX language is that a source file is *plain text*, sometimes called an ASCII file.[2] Therefore articles containing even the most complicated mathematical expressions can be readily transmitted *electronically*—to colleagues, coauthors, journals, editors, and publishers.

TEX is *platform independent*. You may type the source file on a Macintosh, and your coauthor may make improvements to the same file on an IBM compatible personal computer; the journal publishing the article may use a DEC minicomputer. The form of TEX, a richer version, used to typeset documents is called *Plain TEX*. I'll not try to distinguish between the two.

TEX, however, is a programming language, meant to be used by programmers.

LATEX

LATEX is much easier and safer to work with than TEX; it has a number of built-in safety features and a large set of error messages.

LATEX, building on TEX, provides the following additional features:

- An article is divided into *logical units* such as an abstract, sections, theorems, a bibliography, and so on. The logical units are typed separately. After all the

[1] Of course, markup languages have always dominated typographic work of high quality. On the Internet, the most trendy communications on the World Wide Web are written in a markup language called HTML (HyperText Markup Language).

[2] ASCII stands for American Standard Code for Information Interchange.

units have been typed, LaTeX organizes the *placement* and *formatting* of these elements.

Notice line 4 of the source file of the `sampart.tex` sample article

```
\documentclass{amsart}
```

on page 364. Here the general design is specified by the `amsart` "document class", which is the $\mathcal{AMS}$ article document class. When submitting your article to a journal that is equipped to handle LaTeX articles (and the number of such journals is increasing rapidly), only the *name of the document class* is replaced by the editor to make the article conform to the design of the journal.

- LaTeX relieves you of tedious *bookkeeping chores*. Consider a completed article, with theorems and equations numbered and properly cross-referenced. Upon final reading, some changes must be made—for example, section 4 has to be placed after section 7, and a new theorem has to be inserted somewhere in the middle. Such a minor change used to be a major headache! But with LaTeX, it becomes almost a pleasure to make such changes. LaTeX automatically redoes all the numbering and cross-references.
- Typing the same *bibliographic references* in article after article is a tedious chore. With LaTeX you may use BibTeX, a program that helps you create and maintain bibliographic databases, so references need not be retyped for each article. BibTeX will select and format the needed references from the databases.

All the features of LaTeX are made available by the `LaTeX` format, which you should use to typeset the sample documents in this book.

$\mathcal{AMS}$-LaTeX

The $\mathcal{AMS}$ enhanced the capabilities of LaTeX in three different areas. You decide which of these are important to you.

1. Math enhancements. The first area of improvement is a wide variety of tools for typesetting math. $\mathcal{AMS}$-LaTeX provides

   - excellent tools to deal with *multiline math formulas* requiring special alignment. For instance, in the following formula, the equals sign ($=$) is vertically aligned and so are the explanatory comments:

$$\begin{aligned} x &= (x+y)(x+z) && \text{(by distributivity)} \\ &= x + yz && \text{(by Condition (M))} \\ &= yz \end{aligned}$$

- numerous constructs for typesetting math, exemplified by the following formula:

$$f(x) = \begin{cases} -x^2, & \text{if } x < 0; \\ \alpha + x, & \text{if } 0 \le x \le 1; \\ x^2, & \text{otherwise.} \end{cases}$$

- special spacing rules for dozens of formula types, for example

$$a \equiv b \pmod{\Theta}$$

  If the above formula is typed inline, it becomes: $a \equiv b \pmod{\Theta}$; the spacing is automatically changed.
- multiline "subscripts" as in

$$\sum_{\substack{i<n \\ j<m}} \alpha_{i,j}^2$$

- user-defined symbols for typesetting math, such as

$$\operatorname{Trunc} f(x), \quad \hat{\hat{A}}, \quad {}^*\sum{}^*$$

- formulas numbered in a variety of ways:
  - automatically,
  - manually (by tagging),
  - by groups, with a group number such as (2), and individual numbers such as (2a), (2b), and so on.
- the `proof` environment and three theorem styles; see the `sampart.tex` sample article (pages 361–363) for examples.

2. Document classes. $\mathcal{AMS}$-LaTeX provides a number of document classes, including the $\mathcal{AMS}$ article document class, `amsart`, which allows the input of the title page information (author, address, e-mail, and so on) as separate entities. As a result, a journal can typeset even the title page of an article according to its own specifications without having to retype it.

   Many users prefer the visual design of the `amsart` document class to the simpler design of the classical LaTeX `article` document class.

3. Fonts. There are hundreds of binary operations, binary relations, negated binary relations, bold symbols, arrows, extensible arrows, and so on, provided by $\mathcal{AMS}$-LaTeX, which also makes available additional math alphabets such as Blackboard bold, Euler Fraktur, Euler Script, and math bold italic. Here are just a few examples:

$$\leftleftarrows, \quad \blacktriangle, \quad \nexists, \quad \supsetneqq, \quad \mathbb{A}, \quad \mathfrak{p}, \quad \mathcal{E}$$

We have barely scratched the surface of this truly powerful set of enhancements.

What is in the book?

Part I (Chapter 1) will help you get started quickly with LaTeX; if you read it carefully, you'll certainly be ready to start typing your first article and tackle LaTeX in more depth.

Part I guides you through:

- marking up text, which is quite easy;
- marking up math, which is not so straightforward (four sections ease you into mathematical typesetting: the first discusses the basic building blocks; the second shows how to build up a complicated formula in simple steps; the third is a formula gallery; and the fourth deals with equations and multiline formulas);
- the anatomy of an article;
- how to set up an article template;
- typing your first article.

Part II introduces the two most basic skills in depth: *typing text* and *typing math*.

Chapters 2 and 3 introduce *text* and *displayed text*. Chapter 2 is very important; when typing your LaTeX document, you spend most of your time typing text. The topics covered include special characters and accents, hyphenation, fonts, and spacing. Chapter 3 covers displayed text including *lists* and *tables*, and for the mathematician, proclamations (theorem-like structures) and proofs.

Chapters 4 and 5 discuss *math* and *displayed math*. Of course, typing math is the heart of any mathematical typesetting system. Chapter 4 discusses this topic in detail, including basic constructs, operators, delimiters, building new symbols, fonts, and grouping of equations. Chapter 5 presents one of the major contributions of $\mathcal{AMS}$-LaTeX: aligned multiline formulas. This chapter also contains other multiline formulas.

Part III discusses the parts of a LaTeX document. In Chapter 6, you learn about the structure of a LaTeX document. The most important topics are sectioning and cross-referencing. In Chapter 7, the standard LaTeX document classes are presented: `article`, `report`, `book`, and `letter`, along with a description of the standard LaTeX distribution. In Chapter 8, the $\mathcal{AMS}$ document classes are discussed. In particular, the title page information for the `amsart` document class and a description of the standard $\mathcal{AMS}$-LaTeX distribution is presented.

Part IV (Chapter 9) introduces techniques to *customize* LaTeX to speed up typing source files and typesetting of documents. LaTeX really speeds up with user-defined commands, user-defined environments, and custom formats. You'll learn how parameters that effect the behavior of LaTeX are stored in *counters* and *length commands*, how to change them, and how to design custom lists.

In Part V (Chapters 10 and 11), we'll discuss two programs: BIBTEX and *MakeIndex* that complement the standard LATEX distribution; they give a helping hand in making large bibliographies and indices.

Appendices A and B will probably be needed quite often in your work: they contain *math symbol tables* and *text symbol tables*.

Appendix C presents the $\mathcal{AMS}$-LATEX sample article, `sampart.tex`, first in typeset form (pages 361–363), then in "mixed" form, showing the source file and the typeset article together (pages 364–371). You can learn a lot about LATEX and $\mathcal{AMS}$-LATEX just by reading the source file a paragraph at a time and see how that paragraph looks typeset. Then Appendix D rewrites this sample article utilizing the user-defined commands collected in `lattice.sty` of section 9.5.

Appendix E relates some historical background material on LATEX: how did it develop and how does it work. Appendix F is a brief introduction to the use of PostScript fonts in a LATEX document. Appendix G shows how you can obtain LATEX and $\mathcal{AMS}$-LATEX, and how you can keep them up-to-date through the Internet. A work session is reproduced (in part) using "anonymous ftp" (file transfer protocol).

Appendix H will help those who have worked with (Plain) TEX, LATEX version 2.09, $\mathcal{AMS}$-TEX, or $\mathcal{AMS}$-LATEX version 1.1, programs from which the new LATEX and $\mathcal{AMS}$-LATEX developed. Some tips are given to smooth the transition to the new LATEX and $\mathcal{AMS}$-LATEX.

Finally, Appendix I points the way for further study. The most important book for extending and customizing LATEX is *The LATEX Companion*, the work of Michel Goossens, Frank Mittelbach, and Alexander Samarin [12].

Typographical conventions

To make this book easy to read, I use some very simple conventions on the use of fonts.

Explanatory text is set in the Galliard font, as this text is.

This book is about typesetting math in LaTeX. So often you are told to type in some material and shown how it'll look typeset.

```
I use this font, Courier, to show what you have to type.
All characters have the same width so it's  easy to
distinguish it from the other fonts used in this book.
```

I use the same font for commands (`\parbox`), environments (`align`), documents (`sampart.tex`), document classes (`article`), directories and folders (`work`), packages (amsmath), counters (`tocdepth`), and so on.

When I show you how something looks when typeset, I use this font, Computer Modern roman, which you'll most likely see when you use LaTeX. This looks sufficiently different from the other two fonts I use so that you should have little difficulty recognizing typeset LaTeX material. If the typeset material is a separate paragraph (or paragraphs), I make it visually stand out even more by adding the little corner symbols on the margin to offset it.

When I give explanations in the text: "Compare iff with iff, typed as `iff` and `if{f}`, respectively." I use the same fonts but since they are not visually set off, it may be a little harder to see that iff is in Computer Modern roman and `iff` is in Courier.

PART I

A short course

CHAPTER

1

Typing your first article

In this chapter, you'll start writing your first article. All you have to do is to type the (electronic) *source file*; LaTeX does the rest.

In the next few sections, I'll introduce you to the most important commands for typesetting text and math by working through examples. Go to the latter parts of this book for more detail.

The source file is made up of *text*, *math* (for instance, $\sqrt{5}$), and *instructions* to LaTeX. This is how you type the last sentence:

```
The source file is made up of \emph{text}, \emph{math} (for
instance, $\sqrt{5}$), and \emph{instructions} to \LaTeX.
```

In this sentence,

```
The source file is made up of \emph{text}, \emph{math} (for
instance,
```

is text,

```
$\sqrt{5}$
```

is math, and

`\emph{text}`

is an instruction (a command). Commands, as a rule, start with a backslash `\` and are meant to instruct LaTeX; this particular command, `\emph`, emphasizes `text` given as its *argument* (between the braces). Another kind of instruction is called an *environment*. For instance,

```
\begin{flushright}
```

and

```
\end{flushright}
```

bracket a `flushright` environment—what is typed inside this environment comes out right justified (lined up against the right margin) in the printed form.

In practice, text, math, and instructions are intertwined. For example,

```
\emph{My first integral} $\int \zeta^{2}(x) \, dx$
```

which produces

My first integral $\int \zeta^2(x)\,dx$

is a mixture of all three. Nevertheless, to some extent I try to introduce the three topics: typing text, typing math, and giving instructions to LaTeX (commands and environments) as if they were separate topics.

I introduce the basic features of LaTeX by working with a number of sample documents. If you wish to obtain these documents electronically, create a subdirectory (folder) on your computer, say, `ftp`, and proceed to download all the sample files as described in section G.6. Also create a subdirectory (folder) called `work`. Whenever you want to use one of these documents, copy it from the `ftp` subdirectory (folder) to the `work` subdirectory (folder), so that the original remains unchanged; alternatively, type in the examples as shown in the book. *In this book, the* `ftp` *directory and the* `work` *directory will refer to the directories (folders) you hereby create without further elaboration.*

1.1 Typing a very short "article"

First we discuss how to use the keyboard in LaTeX, and then type a very short "article" containing only text.

1.1.1 The keyboard

In LaTeX, to type text, use the following keys:

```
  a-z   A-Z   0-9
+ = * / ( ) [ ]
```

You may also use the punctuation marks

```
, ; . ? ! : ‘ ’ -
```

and the spacebar, the tab key, and the return (or enter) key.

There are thirteen special keys (on most keyboards):

```
# $ % & ~ _ ^ \ { } @ " |
```

used mostly in LaTeX instructions. There are special commands to type most of these special characters (as well as composite characters, such as accented characters) if you need them in text. For instance, $ is typed as `\$`, _ is typed as `\_`, and % is typed as `\%` (while ä is typed as `\"{a}`); however, @ is typed as `@`. See sections 2.4.4 and 2.4.6 and the tables of Appendix B for more detail.

Every other key is prohibited! (Unless there are special steps are taken; more about this in section 2.1.) Do not use the computer's modifier keys, such as Alt, Ctrl, Command, Option, to produce special characters. LaTeX will either reject or misunderstand them. When trying to typeset a source file that contains a *prohibited character*, LaTeX will display the error message:

```
! Text line contains an invalid character.
l.222 completely irreducible^^?
                          ^^?
```

In this message `l.222` means line 222 of your source file. You must edit this line. The log file (see section 1.11.3) also contains this message.

1.1.2 Your first note

We start our discussion on how to type a note in LaTeX with a simple example. Suppose you want to use LaTeX to produce the following:

It is of some concern to me that the terminology used in multi-section math courses is not uniform.

In several sections of the course on matrix theory, the term "hamiltonian-reduced" is used. I, personally, would rather call these "hyper-simple". I invite others to comment on this problem.

Of special concern to me is the terminology in the course by Prof. Rudi Hochschwabauer. Since his field is new, there is no accepted terminology. It is imperative that we arrive at a satisfactory solution.

Create a new file in the `work` directory with the name `note1.tex` and type the following (if you prefer not to type it, copy the file from the `ftp` directory; see page 4):

```
% Sample file: note1.tex
% Typeset with LaTeX format
\documentclass{article}

\begin{document}
It is of some concern to me   that
the terminology used in  multi-section
 math courses is not uniform.

In several sections of the course on
matrix theory, the  term
 ‘‘hamiltonian-reduced’’ is used.
  I, personally, would rather call these ‘‘hyper-simple’’. I
invite others to comment on this  problem.

Of special concern to me is the terminology in the course
by Prof.~Rudi Hochschwabauer.
  Since his field is new, there is
 no accepted
terminology.   It is imperative
that we arrive at a satisfactory solution.
\end{document}
```

The first two lines start with `%`; they are *comments* ignored by LaTeX. (The `%` character is very useful. If, for example, while typing the source file you want to make a comment, but do not want that comment to appear in the typeset version, start the line with `%`. The whole line will be ignored during typesetting. You can also comment out a part of a line:

```
... % ...
```

The part of a line past the % character will be ignored.)

The line after the two comments names the “document class”, which specifies how the document will be formatted.

The text of the note is typed within the “`document` environment”, that is, between the two lines

```
\begin{document}
```

and

```
\end{document}
```

Now typeset `note1.tex`; you should get the same typeset document as shown on page 5.

As seen in the previous example, LaTeX is somewhat different from most word processors. It ignores the way *you* format the text, and follows only the formatting instructions given by the markup commands. LaTeX takes note of whether you put a space in the text, but it ignores *how many spaces* are inserted. In LaTeX, one or more blank lines mark the end of a paragraph. Tabs are treated as spaces. Note that you typed the left double quote as `''` (two left single quotes) and the right double quote as `''` (two right single quotes). The left single quote key is not always easy to find; it usually hides in the upper left or upper right corner of the keyboard. The symbol ~ is called a "tie" and keeps `Prof.` and `Rudi` together.

1.1.3 Lines too wide

LaTeX reads the text in the source file one line at a time and when the end of a paragraph is reached, LaTeX typesets it (see section E.2 for a more detailed discussion). Most of the time, there is no need for corrective action. Occasionally, however, LaTeX gets into trouble splitting the paragraph into typeset lines. To illustrate this, modify `note1.tex`: in the second sentence replace "`term`" by "`strange term`", and in the fourth sentence delete "`Rudi `". Save this modified file with the name `note1b.tex` in the `work` directory. (You'll find `note1b.tex` in the `ftp` directory—see page 4).

Typesetting `note1b.tex`, you get:

It is of some concern to me that the terminology used in multi-section math courses is not uniform.

In several sections of the course on matrix theory, the strange term "hamiltonian-reduced" is used. I, personally, would rather call these "hyper-simple". I invite others to comment on this problem.

Of special concern to me is the terminology in the course by Prof. Hochschwabauer. Since his field is new, there is no accepted terminology. It is imperative that we arrive at a satisfactory solution.

The first line of paragraph two is about 1 / 4 inch too wide. The first line of paragraph three is even wider. On your monitor, LaTeX displays the message:

```
Overfull \hbox (15.38948pt too wide) in paragraph at lines 10--15
[]\OT1/cmr/m/n/10 In sev-eral sec-tions of the course on ma-trix
the-ory, the strange term ‘‘hamiltonian-
 []
Overfull \hbox (23.27834pt too wide) in paragraph at lines 16--22
[]\OT1/cmr/m/n/10 Of spe-cial con-cern to me is the ter-mi-nol-ogy
```

```
in the course by Prof. Hochschwabauer.
 []
```

You'll find the same message in the log file `note1b.log` (see section 1.11.3).

The reference

```
Overfull \hbox (15.38948pt too wide) in paragraph at lines 10--15
```

is made to paragraph two (lines 10–15); the typeset version has a line (line number unspecified within the typeset paragraph) which is 15.38948pt too wide. LaTeX uses *points* (pt) to measure distances; there are about 72 points to an inch. The next two lines

```
[]\OT1/cmr/m/n/10 In sev-eral sec-tions of the course on ma-trix
the-ory, the strange term ‘‘hamiltonian-
```

identify the source of the problem: LaTeX would not hyphenate

```
hamiltonian-reduced,
```

since it only (automatically) hyphenates a hyphenated word only at the hyphen. You may wonder what `\OT1/cmr/m/n/10` signifies. It says that the current font is the Computer Modern roman font at size 10 points (see section 2.6.1).

The second reference

```
Overfull \hbox (23.27834pt too wide) in paragraph at lines 16--22
```

is made to paragraph three (lines 16–22). The problem is with the word

```
Hochschwabauer
```

which the hyphenation routine of LaTeX can't handle. (If you use a German hyphenation routine, it'll have no difficulty hyphenating `Hochschwabauer`.)

If you encounter such a problem, try to reword the sentence or add an optional hyphen `\-`, which encourages LaTeX to hyphenate at this point if necessary. For instance, rewrite `Hochschwabauer` as

```
Hoch\-schwabauer
```

and the second problem goes away.

Sometimes a small horizontal overflow is difficult to spot. The `draft` document class option is very useful in this case: it'll paint an ugly slug on the margin to mark an overfull line; see sections 7.1.2 and 8.4 for document class options. You may invoke this option by changing the `\documentclass` line to

```
\documentclass[draft]{article}
```

You'll find this version of `note1b.tex` under the name `noteslug.tex` in the `ftp` directory.

1.1.4 More text features

Next you'll produce the following note in LaTeX:

September 21, 1995

From the desk of George Grätzer

February 7–21 *please* use my temporary e-mail address:

George_Gratzer@umanitoba.ca

Type in the following source file, save it as `note2.tex` in the `work` directory (you'll also find `note2.tex` in the `ftp` directory):

```
% Sample file: note2.tex
% Typeset with LaTeX format
\documentclass{article}

\begin{document}
\begin{flushright}
   \today
\end{flushright}
\textbf{From the desk of George Gr\"{a}tzer}\\[10pt]

February~7--21 \emph{please} use my temporary e-mail address:
\begin{center}
   \texttt{George\_Gratzer@umanitoba.ca}
\end{center}
\end{document}
```

This note introduces several additional features of LaTeX:

- The `\today` command displays today's date.
- Use environments to *right justify* or *center* text. Use the `\emph` command to *emphasize* text; the text to be emphasized is surrounded by `{` and `}`. Use `\textbf` for **bold** text; the text to be made bold is also surrounded by `{` and `}`. Similarly, use `\texttt` for `typewriter style` text. `\emph`, `\textbf`, and `\texttt` are examples of *commands with arguments*. Note that command names are case sensitive; do not type `\Textbf` or `\TEXTBF` in lieu of `\textbf`.
- LaTeX commands (almost) always start with `\` followed by the command name, for instance, `\textbf`. The command name is terminated by the first non-alphabetic character.

- Use double hyphens for number ranges (en-dash): `7--21` prints 7–21; use triple hyphens (`---`) for the "em-dash" punctuation mark—such as the one in this sentence.
- If you want to create additional space between lines (as in the last note under the line **From the desk** ...), use the command `\\[10pt]` with an appropriate amount of vertical space. (\\ is the newline command—see section 2.7.1; the variant used in the above example is the newline with additional vertical space.) The distance may be given in points, centimeters (cm), or inches (in). (72.27 points make an inch.)
- There are special rules for *accented characters* and some *European characters*. For instance, ä is typed as `\"{a}`. Accents are explained in section 2.4.6 (see also the tables in Appendix B).

You'll seldom need to know more than this about typing text. For more detail, however, see Chapters 2 and 3. All text symbols are organized into tables in Appendix B.

1.2 Typing math

Now you can start mixing text with math formulas.

1.2.1 The keyboard

In addition to the regular text keys (section 1.1.1), three more keys are needed to type math:

$$| \quad < \quad >$$

(| is the shifted \ key on many keyboards.)

1.2.2 A note with math

You'll begin typesetting math with the following note:

In first year Calculus, we define intervals such as (u, v) and (u, ∞). Such an interval is a *neighborhood* of a if a is in the interval. Students should realize that ∞ is only a symbol, not a number. This is important since we soon introduce concepts such as $\lim_{x\to\infty} f(x)$.

When we introduce the derivative

$$\lim_{x\to a} \frac{f(x) - f(a)}{x - a},$$

we assume that the function is defined and continuous in a neighborhood of a.

To create the source file for this mixed math and text note, create a new document with an editor. Name it `math.tex`, place it in the `work` directory, and type in the following source file—or copy `math.tex` from the `ftp` directory:

```
% Sample file: math.tex
% Typeset with LaTeX format
\documentclass{article}

\begin{document}
In first year Calculus, we   define intervals  such as
$(u, v)$ and $(u, \infty)$.  Such an interval is a
\emph{neighborhood} of  $a$
if  $a$ is in the interval.  Students should
realize that  $\infty$ is only a
symbol, not a number.  This is important since
we soon introduce concepts
 such as $\lim_{x \to \infty} f(x)$.

When we introduce the derivative
\[
   \lim_{x \to a} \frac{f(x) - f(a)}{x - a},
\]
we assume that the function is defined and continuous
in a neighborhood of  $a$.
\end{document}
```

This note introduces the basic techniques of typesetting math with LaTeX:

- There are two kinds of math formulas and environments: *inline* and *displayed*.
- *Inline* math environments open and close with `$`.
- *Displayed* math environments open with `\[` and close with `\]`.
- LaTeX ignores the spaces you insert in math environments with two exceptions: spaces that delimit commands (see section 2.3.1) and spaces in the argument of commands that temporarily revert into text mode. (`\mbox` is such a command; see section 4.5.) Thus spacing in math is important only for the readability of the source file. To summarize:

Rule ■ Spacing in text and math
In text mode, many spaces equal one space, while in math mode, the spaces are ignored.

- The same formula may be typeset differently depending on which math environment it's in. The expression $x \to a$ is typed as a subscript to $\lim$ in the inline

formula $\lim_{x \to a} f(x)$, typed as `$\lim_{x \to a} f(x)$`, but it's placed below $\lim$ in the displayed version:

$$\lim_{x \to a} f(x)$$

typed as

```
\[
   \lim_{x \to a} f(x)
\]
```

- A math symbol is invoked by a command. Examples: the command for ∞ is `\infty` and the command for $\to$ is `\to`. The math symbols are organized into tables in Appendix A.

  To access most of the symbols listed in Appendix A by name, use the amssymb package; in other words, the article should start with

  ```
  \documentclass{article}
  \usepackage{amssymb}
  ```

  The amssymb package loads the amsfonts package, which contains the commands for using the AMSFonts (see section 4.14.2).
- Some commands such as `\sqrt` need *arguments* enclosed in { and }. To typeset $\sqrt{5}$, type `$\sqrt{5}$`, where `\sqrt` is the command and `5` is the argument. Some commands need more than one argument. To get

  $$\frac{3+x}{5}$$

  type

  ```
  \[
     \frac{3+x}{5}
  \]
  ```

  `\frac` is the command, `3 + x` and `5` are the arguments.

There are many mistakes you can make, even in such a simple note. You'll now introduce mistakes in `math.tex`, by inserting and deleting `%` signs to make the mistakes visible to LaTeX one at a time. Recall that lines starting with `%` are ignored by LaTeX. Type the following source file, and save it under the name `mathb.tex` in the `work` directory (or copy over the file `mathb.tex` from the `ftp` directory).

```
% Sample file: mathb.tex
% Typeset with LaTeX format
\documentclass{article}
```

```
\begin{document}
In first year Calculus, we   define intervals  such as
%$(u, v)$ and $(u, \infty)$.  Such an interval is a
 $(u, v)$ and    (u, \infty)$.  Such an interval is a
 {\emph{neighborhood} of $a$
if $a$ is in the interval.  Students should
realize that  $\infty$ is only a
symbol, not a number.  This is important since
we soon introduce concepts
 such as $\lim_{x \to \infty} f(x)$.
%such as $\lim_{x \to \infty f(x)$.

When we introduce the derivative
\[
    \lim_{x \to a} \frac{f(x) - f(a)}{x - a}
   %\lim_{x \to a} \frac{f(x) - f(a)  x - a}
\]
we assume that the function is defined and continuous
in a neighborhood of  $a$.
\end{document}
```

Exercise 1 Note that in line 8, the second `$` is missing. When you typeset the `mathb.tex` file, LaTeX sends the error message:

```
! Missing $ inserted.
<inserted text>
                $
l.8 ..., v)$ and    (u, \infty
                                  )$.  Such an interval is a
?
```

Since you omitted `$`, LaTeX reads `(u, \infty)` as text; but the `\infty` command instructs LaTeX to typeset a math symbol, which can only be done in math mode. So LaTeX offers to put a `$` in front of `\infty`. LaTeX suggests a cure, but in this example it comes too late. Math mode should start just prior to `(u`.

Exercise 2 In the `mathb.tex` file, delete `%` at the beginning of line 7 and insert a `%` at the beginning of line 8 (this eliminates the previous error); delete `%` at the beginning of line 15 and insert a `%` at the beginning of line 14 (this introduces a new error: the closing brace of the subscript is missing). Save the changes, and typeset the note. You get the error message:

```
! Missing } inserted.
<inserted text>
                }
```

```
l.15 ...im_{x \to \infty f(x)$
                                    .
?
```

LaTeX is telling you that a closing brace } is missing, but it's not sure where. LaTeX noticed that the subscript started with { and it reached the end of the math formula before finding }. You must look in the formula for a { that is not closed, and close it with }.

Exercise 3 Delete `%` at the beginning of line 14 and insert a `%` at the beginning of line 15, which removes the last error, and delete `%` at the beginning of line 20 and insert a `%` at the beginning of line 19 (introducing the final error: deleting the closing brace of the first argument of `\frac`). Save and typeset the file. You get the error message:

```
! LaTeX Error: Bad math environment delimiter.

l.21 \]
```

There is a bad math environment delimiter in line 21, namely, `\]`. So the reference to

```
! Bad math environment delimiter.
```

is to the displayed formula. Since the environment delimiter is correct, something must have gone wrong with the displayed formula. This is what happened: LaTeX was trying to typeset

```
\lim_{x \to a} \frac{f(x) - f(a)  x - a}
```

but `\frac` needs two arguments. LaTeX found `f(x) - f(a)  x - a` as the first argument. While looking for the second, it found `\]`, which is obviously an error (it was looking for a `{`).

1.2.3 Building blocks of a formula

A formula is built up from various types of components. We group them as follows:

- Arithmetic
- Subscripts and superscripts
- Accents
- Binomial coefficients
- Congruences
- Delimiters
- Operators
- Ellipses
- Integrals

- Matrices
- Roots
- Sums and products
- Text

Some of the commands in the following examples are defined in the amsmath package; in other words, to typeset these examples with the `article` document class, the article should start with

```
\documentclass{article}
\usepackage{amssymb,amsmath}
```

Arithmetic The arithmetic operations $a + b$, $a - b$, $-a$, a/b, ab are typed as expected:

```
$a + b$, $a - b$, $-a$, $a / b$, $a b$
```

If you wish to use $\cdot$ or $\times$ for multiplication, as in $a \cdot b$ or $a \times b$, use `\cdot` or `\times`, respectively. The expressions $a \cdot b$ and $a \times b$ are typed as follows:

```
$a \cdot b$  $a \times b$
```

Displayed fractions, such as

$$\frac{1 + 2x}{x + y + xy}$$

are typed with `\frac`:

```
\[
   \frac{1 + 2x}{x + y + xy}
\]
```

The `\frac` command is seldom used inline.

Subscripts and superscripts Subscripts are typed with _ (underscore) and superscripts with ^ (caret). Remember to enclose the subscripts and superscripts with { and }. To get a_1, type the following characters:

Go into inline math mode:	`$`
type the letter a:	`a`
subscript command:	`_`
bracket the subscripted 1:	`{1}`
exit inline math mode:	`$`

that is, type `$a_{1}$`. Omitting the braces in this example causes no harm; however, to get a_{10}, you *must* type `$a_{10}$`. Indeed, `$a_10$` prints a_10. Further examples: a_{i_1}, a^2, a^{i_1} are typed as

```
$a_{i_{1}}$, $a^{2}$, $a^{i_{1}}$
```

Accents The four most often used math accents are:

$\bar{a}$ typed as `$\bar{a}$`

$\hat{a}$ typed as `$\hat{a}$`

$\tilde{a}$ typed as `$\tilde{a}$`

$\vec{a}$ typed as `$\vec{a}$`

Binomial coefficients The amsmath package provides the `\binom` command for binomial coefficients. For example, $\binom{a}{b+c}$ is typed inline as

```
$\binom{a}{b + c}$
```

whereas the displayed version

$$\binom{a}{b+c}\binom{\frac{n^2-1}{2}}{n+1}$$

is typed as

```
\[
   \binom{a}{b + c} \binom{\frac{n^{2} - 1}{2}}{n + 1}
\]
```

Congruences The two most important forms are:

$a \equiv v \pmod{\theta}$	typed as	`$a \equiv v \pmod{\theta}$`
$a \equiv v \pod{\theta}$	typed as	`$a \equiv v \pod{\theta}$`

The second form requires the amsmath package.

Delimiters These are parenthesis-like symbols that vertically expand to enclose a formula. For example: $(a + b)^2$, which is typed as `$(a + b)^{2}$`, and

$$\left(\frac{1 + x}{2 + y^2} \right)^2$$

which is typed as

```
\[
   \left( \frac{1 + x}{2 + y^{2}} \right)^{2}
\]
```

contain such delimiters. The `\left(` and `\right)` commands tell LaTeX to size the parentheses correctly (relative to the size of the symbols inside the parentheses). Two further examples:

$$\left|\frac{a+b}{2}\right|, \quad \left\|A^2\right\|$$

would be typed as:

```
\[
  \left| \frac{a + b}{2} \right|,
      \quad \left\| A^{2} \right\|
\]
```

where `\quad` is a spacing command (see section 4.11 and Appendix A).

Operators To typeset the sine function $\sin x$, type: `$\sin x$`. Note that `$sin x$` prints: $sinx$, where the typeface of sin is wrong, as is the spacing.

LaTeX calls `\sin` an *operator*; there are a number of operators listed in section 4.7.1 and Appendix A. Some are just like `\sin`; others produce a more complex display:

$$\lim_{x \to 0} f(x) = 0$$

which is typed as

```
\[
   \lim_{x \to 0} f(x) = 0
\]
```

Ellipses The ellipsis (...) in math sometimes needs to be printed as low dots and sometimes as (vertically) centered dots. Print low dots with the `\ldots` command as in $F(x_1, x_2, \ldots, x_n)$, typed as

```
$F(x_{1}, x_{2}, \ldots , x_{n})$
```

Print centered dots with the `\cdots` command as in $x_1 + x_2 + \cdots + x_n$, typed as

```
$x_{1} + x_{2} + \cdots + x_{n}$
```

If you use the amsmath package, there is a good chance that the command `\dots` will print the ellipsis as desired.

Integrals The command for an integral is `\int`; the lower limit is a subscript and the upper limit is a superscript. Example: $\int_0^{\pi} \sin x \, dx = 2$ is typed as

```
$\int_{0}^{\pi} \sin x \, dx = 2$
```

`\,` is a spacing command (see section 4.11 and Appendix A).

Matrices The amsmath package provides you with a `matrix` environment:

$$\begin{matrix} a+b+c & uv & x-y & 27 \\ a+b & u+v & z & 134 \end{matrix}$$

which is typed as follows:

```
\[
   \begin{matrix}
      a + b + c & uv    & x - y & 27\\
      a + b     & u + v & z     & 134
   \end{matrix}
\]
```

The matrix elements are separated by `&`; the rows are separated by `\\`. The basic form gives no parentheses; for parentheses, use the `pmatrix` environment; for brackets, the `bmatrix` environment; for vertical lines (determinants, for example), the `vmatrix` environment; for double vertical lines, the `Vmatrix` environment. For example,

$$\mathbf{A} = \begin{pmatrix} a+b+c & uv \\ a+b & u+v \end{pmatrix} \begin{pmatrix} 30 & 7 \\ 3 & 17 \end{pmatrix}$$

is typed as follows:

```
\[
   \mathbf{A} =
   \begin{pmatrix}
      a + b + c & uv\\
      a + b & u + v
   \end{pmatrix}
   \begin{pmatrix}
      30 & 7\\
      3 & 17
   \end{pmatrix}
\]
```

Roots `\sqrt` produces the square root; for instance, $\sqrt{5}$ is typed as

```
$\sqrt{5}$
```

and $\sqrt{a+2b}$ is typed as

```
$\sqrt{a + 2b}$
```

The nth root, $\sqrt[n]{5}$, is done with two arguments:

```
$\sqrt[n]{5}$
```

Note that the first argument is in brackets `[ ]`; it's an *optional argument* (see section 2.3).

Sums and products The command for sum is `\sum` and for product is `\prod`. The examples

$$\sum_{i=1}^{n} x_i^2 \qquad \prod_{i=1}^{n} x_i^2$$

are typed as

```
\[
   \sum_{i=1}^{n} x_{i}^{2} \qquad \prod_{i=1}^{n} x_{i}^{2}
\]
```

`\qquad` is a spacing command; it separates the two formulas (see section 4.11 and Appendix A).

Sums and products are examples of *large operators*; all of them are listed in section 4.8 and Appendix A. They display in a different style (and size) when used in an inline formula: $\sum_{i=1}^{n} x_i^2 \quad \prod_{i=1}^{n} x_i^2$.

Text Place text in a formula with an `\mbox` command. For instance,

$$a = b \quad \text{by assumption}$$

is typed as

```
\[
   a = b \mbox{\qquad by assumption}
\]
```

Note the space command `\qquad` in the argument of `\mbox`. You could also have typed

```
\[
   a = b \qquad \mbox{by assumption}
\]
```

because `\qquad` works in text as well as in math.

If you use the amsmath package, then the `\text` command is available in lieu of the `\mbox` command. It works just like the `\mbox` command except that it automatically changes the size of its argument as required, as in a^{power}, typed as

```
$a^{ \text{power} }$
```

If you do not want to use the large amsmath package, the tiny amstext package also provides the `\text` command (see section 8.5).

1.2.4 Building a formula step-by-step

It is simple to build up complicated formulas from the components described in section 1.2.3. Take the formula

$$\sum_{i=1}^{\left[\frac{n}{2}\right]} \binom{x_{i,i+1}^{i^2}}{\left[\frac{i+3}{3}\right]} \frac{\sqrt{\mu(i)^{\frac{3}{2}}(i^2-1)}}{\sqrt[3]{\rho(i)-2}+\sqrt[3]{\rho(i)-1}}$$

for instance. You should build this up in several steps. Create a new file in the `work` directory. Call it `formula.tex` and type in the lines:

```
% File: formula.tex
% Typeset with LaTeX format
\documentclass{article}
\usepackage{amssymb,amsmath}
\begin{document}
\end{document}
```

and save it. At present, the file has an empty `document` environment.[1] Type each part of the formula as an inline or displayed formula so that you can typeset the document and check for errors.

Step 1 Let's start with $\left[\frac{n}{2}\right]$:

```
$\left[ \frac{n}{2} \right]$
```

Type this into `formula.tex` and test it by typesetting the document.

Step 2 Now you can do the sum:

$$\sum_{i=1}^{\left[\frac{n}{2}\right]}$$

For the superscript, you can cut and paste the formula created in Step 1 (without the dollar signs), to get

```
\[
   \sum_{i = 1}^{ \left[ \frac{n}{2} \right] }
\]
```

[1] The quickest way to create this file is to open `mathb.tex`, save it under the new name `formula.tex`, and delete the lines in the `document` environment. Then add the line `\usepackage{amssymb,amsmath}`

Step 3 Next, do the two formulas in the binomial:

$$x_{i,i+1}^{i^2} \qquad \left[\frac{i+3}{3}\right]$$

Type them as separate formulas in `formula.tex`:

```
\[
   x_{i, i + 1}^{i^{2}} \qquad \left[ \frac{i + 3}{3} \right]
\]
```

Step 4 Now it's easy to do the binomial. Type the following formula by cutting and pasting the previous formulas:

```
\[
   \binom{ x_{i,i + 1}^{i^{2}} }{ \left[ \frac{i + 3}{3} \right] }
\]
```

which prints:

$$\binom{x_{i,i+1}^{i^2}}{\left[\frac{i+3}{3}\right]}$$

Step 5 Next type the formula under the square root $\mu(i)^{\frac{3}{2}}(i^2-1)$ as

```
$\mu(i)^{ \frac{3}{2} } (i^{2} - 1)$
```

and then the square root $\sqrt{\mu(i)^{\frac{3}{2}}(i^2-1)}$ as

```
$\sqrt{ \mu(i)^{ \frac{3}{2} } (i^{2} - 1) }$
```

Step 6 The two cube roots, $\sqrt[3]{\rho(i)-2}$ and $\sqrt[3]{\rho(i)-1}$, are easy to type:

```
$\sqrt[3]{ \rho(i) - 2 }$  $\sqrt[3]{ \rho(i) - 1 }$
```

Step 7 So now get the fraction:

$$\frac{\sqrt{\mu(i)^{\frac{3}{2}}(i^2-1)}}{\sqrt[3]{\rho(i)-2}+\sqrt[3]{\rho(i)-1}}$$

typed, cut, and pasted as

```
\[
   \frac{ \sqrt{ \mu(i)^{ \frac{3}{2}} (i^{2} -1) } }
        { \sqrt[3]{\rho(i) - 2} + \sqrt[3]{\rho(i) - 1} }
\]
```

Step 8 Finally, get the formula

$$\sum_{i=1}^{\left[\frac{n}{2}\right]} \binom{x_{i,i+1}^{i^2}}{\left[\frac{i+3}{3}\right]} \frac{\sqrt{\mu(i)^{\frac{3}{2}}(i^2-1)}}{\sqrt[3]{\rho(i)-2}+\sqrt[3]{\rho(i)-1}}$$

by cutting and pasting the pieces together, leaving only one pair of displayed math delimiters:

```
\[
   \sum_{i = 1}^{ \left[ \frac{n}{2} \right] }
      \binom{ x_{i, i + 1}^{i^{2}} }
            { \left[ \frac{i + 3}{3} \right] }
      \frac{ \sqrt{ \mu(i)^{ \frac{3}{2}} (i^{2} - 1) } }
           { \sqrt[3]{\rho(i) - 2} + \sqrt[3]{\rho(i) - 1} }
\]
```

Notice the use of

- spacing to help distinguish the braces (note that some editors help you balance the braces);
- separate lines for the various pieces.

Keep the source file readable. Of course, this is for your benefit, since LaTeX does not care. It would also accept

```
\[\sum_{i=1}^{\left[\frac{n}{2}\right]}\binom{x_{i,i+1}^{i^{2}}}
{\left[\frac{i+3}{3}\right]}\frac{\sqrt{\mu(i)^{\frac{3}
{2}}(i^{2}-1)}}{\sqrt[3]{\rho(i)-2}+\sqrt[3]{\rho(i)-1}}\]
```

Problems arise with this haphazard style when you make a mistake. Try to find the error in the next version:

```
\[\sum_{i=1}^{\left[\frac{n}{2}\right]}\binom{x_{i,i+1}^{i^{2}}}
{\left[\frac{i+3}{3}\right]}\frac{\sqrt{\mu(i)^{\frac{3}
{2}}}(i^{2}-1)}}{\sqrt[3]{\rho(i)-2}+\sqrt[3]{\rho(i)-1}}\]
```

(Answer: `\frac{3}{2}` should be followed by `}}` and not by `}}}`.)

1.3 Formula gallery

In this section, I present the formula gallery (`gallery.tex` in the `ftp` directory), a collection of formulas—some simple, some complex—that illustrate the power of LaTeX and $\mathcal{AMS}$-LaTeX. Most of the commands in these examples have not yet been discussed, but comparing the source formula with the typeset version should answer most of your questions. Occasionally, I'll give you a helping hand with some comments.

Many of these formulas are from text books and research articles. The last six are reproduced from the document `testart.tex` that was distributed by the $\mathcal{AMS}$ with $\mathcal{AMS}$-LaTeX version 1.1. Some of these examples require the amssymb and amsmath packages. So make sure to include the line

```
\usepackage{amssymb,amsmath}
```

following the `documentclass` line of any article using such constructs. The packages (if any) required for each formula shall be indicated.

Formula 1 A set-valued function:

$$x \mapsto \{\, c \in C \mid c \leq x \,\}$$

```
\[
   x \mapsto \{\, c \in C \mid c \leq x \,\}
\]
```

Note that both `|` and `\mid` print |. Use | for absolute value signs. In this formula, `\mid` is used because it provides extra spacing (see section 4.6.4). To equalize the spacing around $c \in C$ and $c \leq x$, a thin space was added inside each brace (see section 4.11). The same technique is used in a number of other formulas below.

Formula 2 The `\left|` and `\right|` commands print the vertical bars | whose size adjusts to the size of the formula. The `\mathfrak` command provides access to the *Fraktur math alphabet* (which requires the amsfonts or the eufrak package):

$$\left| \bigcup (\, I_j \mid j \in J \,) \right| < \mathfrak{m}$$

typed as

```
\[
   \left| \bigcup (\, I_{j} \mid j \in J \,) \right|
    < \mathfrak{m}
\]
```

Formula 3 Note that you need spacing both before and after the text fragment "for some" in the following example. The argument of `\mbox` is typeset in text mode, so a single space is recognized.

$$A = \{\, x \in X \mid x \in X_i \quad \text{for some } i \in I \,\}$$

```
\[
   A = \{\, x \in X \mid x \in X_{i}
             \mbox{\quad for some } i \in I \,\}
\]
```

Formula 4 Space to show the logical structure:

$$\langle a_1, a_2\rangle \leq \langle a'_1, a'_2\rangle \qquad \text{iff} \qquad a_1 < a'_1 \quad \text{or} \quad a_1 = a'_1 \text{ and } a_2 \leq a'_2$$

```
\[
   \langle a_{1}, a_{2} \rangle \leq \langle a'_{1}, a'_{2}\rangle
    \qquad \mbox{if{f}} \qquad a_{1} < a'_{1} \quad  \mbox{or}
    \quad a_{1} = a'_{1} \mbox{ and } a_{2} \leq a'_{2}
\]
```

Note that in `if{f}` (in the argument of `\mbox`) the second `f` is in braces to avoid the use of the ligature—the merging of the two f's (see section 2.4.5).

Formula 5 Here are some examples of Greek letters:

$$\Gamma_{u'} = \{\, \gamma \mid \gamma < 2\chi,\ B_\alpha \nsubseteq u',\ B_\gamma \subseteq u' \,\}$$

```
\[
   \Gamma_{u'} = \{\, \gamma \mid \gamma < 2\chi,
    \ B_{\alpha} \nsubseteq u', \ B_{\gamma} \subseteq u' \,\}
\]
```

See Appendix A for a complete listing of Greek letters. The `\nsubseteq` command requires the amssymb package.

Formula 6 `\mathbb` gives the *Blackboard bold math alphabet* (available only in uppercase):

$$A = B^2 \times \mathbb{Z}$$

```
\[
   A = B^{2} \times \mathbb{Z}
\]
```

Blackboard bold requires the amsfonts package.

Formula 7 The `\left(` and `\right)` commands tell LaTeX to size the parentheses correctly (relative to the size of the symbols in the parentheses).

$$\Big(\bigvee(\, s_i \mid i \in I\,)\Big)^c = \bigwedge(\, s_i^c \mid i \in I\,)$$

```
\[
   \left( \bigvee (\, s_{i} \mid i \in I \,) \right)^{c} =
    \bigwedge (\, s_{i}^{c} \mid i \in I \,)
\]
```

Notice how the superscript is placed right on top of the subscript in s_i^c.

Formula 8

$$y \vee \bigvee([B_\gamma] \mid \gamma \in \Gamma) \equiv z \vee \bigvee([B_\gamma] \mid \gamma \in \Gamma) \pmod{\Phi^x}$$

```
\[
   y \vee \bigvee (\, [B_{\gamma}] \mid \gamma
    \in \Gamma \,) \equiv z \vee \bigvee (\, [B_{\gamma}]
    \mid \gamma \in \Gamma \,) \pmod{ \Phi^{x} }
\]
```

Formula 9 Use `\nolimits` so that the "limit" of the large operator is displayed as a subscript:

$$f(\mathbf{x}) = \bigvee\nolimits_{\mathfrak{m}} \Big(\bigwedge\nolimits_{\mathfrak{m}} (x_j \mid j \in I_i) \mid i < \aleph_\alpha \Big)$$

```
\[
   f(\mathbf{x}) = \bigvee\nolimits_{\!\mathfrak{m}}
    \left(\,
       \bigwedge\nolimits_{\mathfrak{m}}
       (\, x_{j} \mid j \in I_{i} \,) \mid i < \aleph_{\alpha}
    \,\right)
\]
```

The `\mathfrak` command requires the amsfonts or the eufrak package. A negative space (`\!`) was inserted to bring $\mathfrak{m}$ a little closer to $\bigvee$ (see section 4.11).

Formula 10 The `\left.` command gives a blank left delimiter.

$$F(x)\Big|_a^b = F(b) - F(a)$$

```
\[
   \left. F(x) \right|_{a}^{b} = F(b) - F(a)
\]
```

Formula 11

$$u \underset{\alpha}{+} v \overset{1}{\sim} w \overset{2}{\sim} z$$

```
\[
  u \underset{\alpha}{+} v \overset{1}{\thicksim} w
    \overset{2}{\thicksim} z
\]
```

The `\underset` and `\overset` commands require the amsmath package.

Formula 12 In this formula, `\mbox` would not work properly, so we use `\text`.

$$f(x) \overset{\text{def}}{=} x^2 - 1$$

```
\[
   f(x) \overset{ \text{def} }{=} x^{2} - 1
\]
```

This formula requires the amsmath package.

Formula 13

$$\overbrace{a + b + \cdots + z}^{n}$$

```
\[
   \overbrace{a + b + \cdots + z}^{n}
\]
```

Formula 14

$$\begin{vmatrix} a + b + c & uv \\ a + b & c + d \end{vmatrix} = 7$$

```
\[
   \begin{vmatrix}
      a + b + c & uv\\
      a + b & c + d
   \end{vmatrix}
   = 7
\]
```

$$\begin{Vmatrix} a + b + c & uv \\ a + b & c + d \end{Vmatrix} = 7$$

```
\[
   \begin{Vmatrix}
      a + b + c & uv\\
      a + b & c + d
   \end{Vmatrix}
   = 7
\]
```

The `vmatrix` and `Vmatrix` environments require the amsmath package.

Formula 15 The `\mathbf{N}` command makes a bold $\mathbf{N}$. (`\textbf{N}` would use a different font, namely, N.)

$$\sum_{j\in\mathbf{N}} b_{ij}\hat{y}_j = \sum_{j\in\mathbf{N}} b_{ij}^{(\lambda)}\hat{y}_j + (b_{ii}-\lambda_i)\hat{y}_i\hat{y}$$

```
\[
   \sum_{j \in \mathbf{N}} b_{ij} \hat{y}_{j} =
   \sum_{j \in \mathbf{N}} b^{(\lambda)}_{ij} \hat{y}_{j} +
   (b_{ii} - \lambda_{i}) \hat{y}_{i} \hat{y}
\]
```

Formula 16 To produce the formula:

$$\left(\prod_{j=1}^{n}\hat{x}_j\right)H_c = \frac{1}{2}\hat{k}_{ij}\det\widehat{\mathbf{K}}(i|i)$$

try

```
\[
   \left( \prod^n_{\, j = 1} \hat x_{j} \right) H_{c} =
    \frac{1}{2} \hat k_{ij} \det \hat{ \mathbf{K} }(i|i)
\]
```

However, this produces:

$$\left(\prod_{j=1}^{n}\hat{x}_j\right)H_c = \frac{1}{2}\hat{k}_{ij}\det\hat{\mathbf{K}}(i|j)$$

Correct the overly large parentheses by using the `\biggl` and `\biggr` commands in place of `\left(` and `\right)`, respectively (see section 4.6.2). Adjust the small hat over K by using `\widehat`:

```
\[
   \biggl( \prod^n_{\, j = 1} \hat x_{j} \biggr) H_{c} =
    \frac{1}{2} \hat{k}_{ij} \det \widehat{ \mathbf{K} }(i|i)
\]
```

Formula 17 In this formula, use `\overline{I}` to get $\overline{I}$ (the variant `\bar{I}`, which prints $\bar{I}$, is less pleasing to me):

$$\det\mathbf{K}(t=1,t_1,\ldots,t_n) = \sum_{I\in\mathbf{n}}(-1)^{|I|}\prod_{i\in I}t_i\prod_{j\in I}(D_j+\lambda_j t_j)\det\mathbf{A}^{(\lambda)}(\overline{I}|\overline{I}) = 0$$

```
\[
   \det \mathbf{K} (t = 1, t_{1}, \dots, t_{n}) =
    \sum_{I \in \mathbf{n} }(-1)^{|I|}
    \prod_{i \in I} t_{i}
    \prod_{j \in I} (D_{j} + \lambda_{j} t_{j})
    \det \mathbf{A}^{(\lambda)} (\overline{I} | \overline{I}) = 0
\]
```

Formula 18 Note that `\|` provides the $\|$ math symbol in this formula:

$$\lim_{(v,v')\to(0,0)} \frac{H(z+v) - H(z+v') - BH(z)(v-v')}{\|v-v'\|} = 0$$

```
\[
   \lim_{(v, v') \to (0, 0)}
    \frac{H(z + v) - H(z + v') - BH(z)(v - v')}
         {\| v - v' \|} = 0
\]
```

Formula 19 This formula uses the calligraphic math alphabet:

$$\int_{\mathcal{D}} |\overline{\partial u}|^2 \Phi_0(z) e^{\alpha |z|^2} \geq c_4 \alpha \int_{\mathcal{D}} |u|^2 \Phi_0 e^{\alpha |z|^2} + c_5 \delta^{-2} \int_A |u|^2 \Phi_0 e^{\alpha |z|^2}$$

```
\[
   \int_{\mathcal{D}} | \overline{\partial u} |^{2}
    \Phi_{0}(z) e^{\alpha |z|^2} \geq
    c_{4} \alpha \int_{\mathcal{D}} |u|^{2} \Phi_{0}
    e^{\alpha |z|^{2}} + c_{5} \delta^{-2} \int_{A}
    |u|^{2} \Phi_{0} e^{\alpha |z|^{2}}
\]
```

Formula 20 The `\hdotsfor` command places dots spanning multiple columns in a matrix.

The `\dfrac` command is the displayed variant of `\frac` (see section 4.4.1).

$$\mathbf{A} = \begin{pmatrix} \dfrac{\varphi \cdot X_{n,1}}{\varphi_1 \times \varepsilon_1} & (x+\varepsilon_2)^2 & \cdots & (x+\varepsilon_{n-1})^{n-1} & (x+\varepsilon_n)^n \\ \dfrac{\varphi \cdot X_{n,1}}{\varphi_2 \times \varepsilon_1} & \dfrac{\varphi \cdot X_{n,2}}{\varphi_2 \times \varepsilon_2} & \cdots & (x+\varepsilon_{n-1})^{n-1} & (x+\varepsilon_n)^n \\ \hdots & & & & \\ \dfrac{\varphi \cdot X_{n,1}}{\varphi_n \times \varepsilon_1} & \dfrac{\varphi \cdot X_{n,2}}{\varphi_n \times \varepsilon_2} & \cdots & \dfrac{\varphi \cdot X_{n,n-1}}{\varphi_n \times \varepsilon_{n-1}} & \dfrac{\varphi \cdot X_{n,n}}{\varphi_n \times \varepsilon_n} \end{pmatrix} + \mathbf{I}_n$$

```
\[
   \mathbf{A} =
   \begin{pmatrix}
```

```
      \dfrac{\varphi \cdot X_{n, 1}}
            {\varphi_{1} \times \varepsilon_{1}}
      & (x + \varepsilon_{2})^{2} & \cdots
      & (x + \varepsilon_{n - 1})^{n - 1}
      & (x + \varepsilon_{n})^{n}\\
      \dfrac{\varphi \cdot X_{n, 1}}
            {\varphi_{2} \times \varepsilon_{1}}
      & \dfrac{\varphi \cdot X_{n, 2}}
              {\varphi_{2} \times \varepsilon_{2}}
      & \cdots & (x + \varepsilon_{n - 1})^{n - 1}
      & (x + \varepsilon_{n})^{n}\\
      \hdotsfor{5}\\
      \dfrac{\varphi \cdot X_{n, 1}}
            {\varphi_{n} \times \varepsilon_{1}}
      & \dfrac{\varphi \cdot X_{n, 2}}
              {\varphi_{n} \times \varepsilon_{2}}
      & \cdots & \dfrac{\varphi \cdot X_{n, n - 1}}
                      {\varphi_{n} \times \varepsilon_{n - 1}}
      & \dfrac{\varphi\cdot X_{n, n}}
              {\varphi_{n} \times \varepsilon_{n}}
   \end{pmatrix}
    + \mathbf{I}_{n}
\]
```

This formula requires the amsmath and the amssymb packages. I'll show in section 9.1.2 how to write this formula so that it's short and more readable.

1.4 Typing equations and aligned formulas

1.4.1 Equations

The `equation` environment creates a displayed math formula and automatically generates a number. The equation

$$\int_0^{\pi} \sin x \, dx = 2 \tag{1}$$

is typed as

```
\begin{equation} \label{E:firstInt}
   \int_{0}^{\pi} \sin x \, dx = 2
\end{equation}
```

Of course, the number generated depends on how many equations precede the given one.

To refer to this formula without having to remember a (changeable) number, assign a *name* to the equation in the argument of a `\label` command; I'll call the name of the equation a *label*. In this section, let's call the first equation "`firstInt`" (first integral). I use the convention that the label of an equation starts with "`E:`".

The number of this formula is referenced with the `\ref` command. For example, to get the reference "see (1)", type

```
see~(\ref{E:firstInt})
```

Alternatively, with the amsmath package, you can use the `\eqref` command. For instance,

```
see~\eqref{E:firstInt}
```

also produces "see (1)".

An advantage of this cross-referencing system is that if a new equation is introduced, or the existing equations are rearranged, the numbering will automatically be adjusted to reflect these changes.

Rule ■ Typeset twice

For renumbering to work, you have to typeset the source file twice.

See sections 6.3.2 and E.2.4. LaTeX will send a warning if you forget.

At the end of the typesetting, LaTeX stores the labels in the aux file (see section 1.11.3). For every label, it stores the number the label is associated with and also the page number on which the label occurs in the typeset version.

An equation will be numbered whether or not there is a `\label` command attached to it. Of course, if there is no `\label` command, the number generated by LaTeX for the equation can't be referenced automatically.

The system described here is called *symbolic referencing*. The argument of `\label` is the "symbol" for the number, and `\ref` provides the referencing. LaTeX uses the same mechanism for all numberings it automatically generates: numbering of section titles, equations, theorems, lemmas, and bibliographic references—except that for bibliographic references the commands are `\bibitem` and `\cite`, respectively (see section 1.7.4).

With the amsmath package, equations can also be *tagged* by attaching a name to the formula with the `\tag` command; the tag replaces the number.

Example:

(Int)
$$\int_0^\pi \sin x\,dx = 2$$

is typed as

```
\begin{equation}
   \int_{0}^{\pi} \sin x \, dx = 2 \tag{Int}
\end{equation}
```

Tags (of the type discussed here) are **absolute**; this equation is always referred to as (Int). Equation numbers, on the other hand, are **relative**; they change as equations are added, deleted, or rearranged.

1.4.2 Aligned formulas

LaTeX, with the help of the amsmath package, has many ways to typeset multiline formulas. Right now, you'll be introduced to three constructs: *simple align*, *annotated align*, and *cases*; see Chapter 5 for a discussion of many others.

The `align` math environment is used for simple and annotated align. *Each line* in this environment is an equation, which LaTeX automatically numbers.

Simple align

Simple align is used to align two or more formulas. To obtain the formulas

$$r^2 = s^2 + t^2 \tag{2}$$

$$2u + 1 = v + w^{\alpha} \tag{3}$$

$$x = \frac{y + z}{\sqrt{s + 2u}} \tag{4}$$

type (using \\ as a line separator)

```
\begin{align}
   r^{2}  &= s^{2} + t^{2}                \label{E:eqn1}\\
   2u + 1 &= v + w^{\alpha}               \label{E:eqn2}\\
   x      &= \frac{y + z}{\sqrt{s + 2u}}  \label{E:eqn3}
\end{align}
```

(These equations are numbered (2), (3), and (4) because they are preceded by one numbered equation earlier in this section.)

The `align` environment can also be used to break a long formula into two. Since numbering both lines is undesirable, you may prevent the numbering of the second line with the `\notag` command.

$$\begin{aligned} h(x) &= \int \left(\frac{f(x) + g(x)}{1 + f^2(x)} + \frac{1 + f(x)g(x)}{\sqrt{1 - \sin x}} \right) dx \\ &= \int \frac{1 + f(x)}{1 + g(x)}\, dx - 2\tan^{-1}(x - 2) \end{aligned} \tag{5}$$

This formula may be typed as

```
\begin{align} \label{E:longInt}
   h(x) &= \int
    \left(
          \frac{ f(x) + g(x) }
               { 1+ f^{2}(x) }
          + \frac{ 1+ f(x)g(x) }
                 { \sqrt{1 - \sin x} }
    \right) \, dx\\
        &= \int \frac{ 1 + f(x) }
                     { 1 + g(x) }
         \, dx - 2 \tan^{-1}(x-2) \notag
\end{align}
```

See the `split` subsidiary math environment in section 5.5.2 for a better way to split a long formula into (two or more) aligned parts, and on how to center the formula number (5) between the two lines.

The rules are easy for simple align:

Rule ■ Simple align

- Separate the lines with `\\`.
- In each line, indicate the alignment point with `&`.
- Place a `\notag` in each line that you do not wish numbered.
- Place a `\label` in each numbered line you may want to reference with `\ref` or `\eqref`.

Annotated align

Annotated align will align the formulas and the annotation (explanatory text) separately:

$$
\begin{aligned}
x &= x \wedge (y \vee z) && \text{(by distributivity)} \\
&= (x \wedge y) \vee (x \wedge z) && \text{(by condition (M))} \\
&= y \vee z. &&
\end{aligned} \tag{6}
$$

This is typed as:

```
\begin{align} \label{E:DoAlign}
   x &= x \wedge (y \vee z)
                      & &\text{(by distributivity)}\\
     &= (x \wedge y) \vee (x \wedge z)
                      & &\text{(by condition (M))} \notag\\
     &= y \vee z. \notag
\end{align}
```

The rules for annotated align are similar to the rules of simple align. In each line, in addition to the alignment point (marked by `&`), there is also a mark for the start of the annotation: `& &`.

The `align` environment does much more than simple and annotated aligns (see section 5.4).

Cases

The `cases` construct is a *subsidiary math environment*; it must be used in a displayed math environment or in an `equation` environment (see section 5.5). Here is a typical example:

$$f(x) = \begin{cases} -x^2, & \text{if } x < 0; \\ \alpha + x, & \text{if } 0 \leq x \leq 1; \\ x^2, & \text{otherwise.} \end{cases}$$

which may be typed as follows:

```
\[
   f(x)=
   \begin{cases}
      -x^{2},        &\text{if $x < 0$;}\\
      \alpha + x,    &\text{if $0 \leq x \leq 1$;}\\
      x^{2},         &\text{otherwise.}
   \end{cases}
\]
```

The rules for `cases` are simple:

Rule ■ `cases`

- Separate the lines with `\\`.
- In each line, indicate the alignment point for the annotation with `&`.

1.5 The anatomy of an article

The `sampart.tex` sample article (typeset on pages 361–363) uses the $\mathcal{AMS}$ article document class, `amsart`. In this introductory chapter, I want to start off with the popular `article` document class of LaTeX, which is easier to use. So we'll use a simplified and shortened sample article, `intrart.tex` (in the `ftp` directory). Type it in as we discuss the parts of an article.

The *preamble* of an article is the initial part of the source file up to the line

```
\begin{document}
```

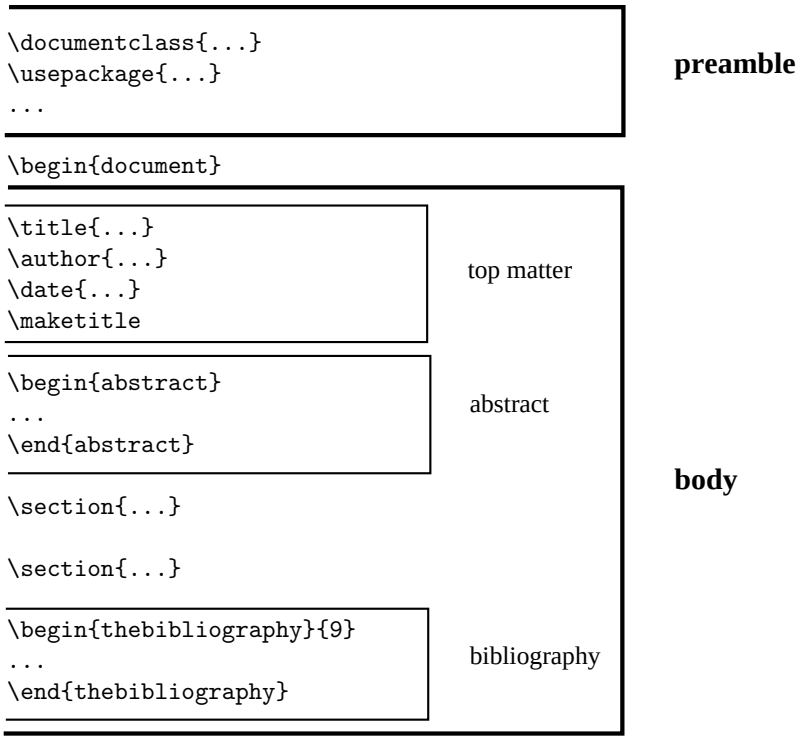

Figure 1.1: A schematic view of an article

See Figure 1.1. The preamble contains instructions for the entire article, for instance, the

`\documentclass`

command.

Here is the preamble of the introductory sample article:

```
% Introductory sample article: intrart.tex
% Typeset with LaTeX format

\documentclass{article}
\usepackage{amssymb,amsmath}
\newtheorem{theorem}{Theorem}
\newtheorem{definition}{Definition}
\newtheorem{notation}{Notation}
```

The preamble names the document class, `article`, and then names the LaTeX enhancements, or packages, used by the article. This article loads two packages:

The amssymb package provides the names of all the math symbols in Appendix A and the amsmath package provides many of the math constructs used.

A *proclamation* is a theorem, definition, corollary, note, and so on. In the preamble, three proclamations are defined. For instance,

```
\newtheorem{theorem}{Theorem}
```

defines the `theorem` environment, which you can use in the body of your article (see section 1.7.3). LaTeX will automatically number and visually format the theorems.

The article proper, called the *body* of the article, is contained in the `document` environment, that is, between the lines

```
\begin{document}
```

and

```
\end{document}
```

as illustrated in Figure 1.1. The body of the article is also logically split up into several parts; we'll discuss these in detail in section 6.1.

The body of the article starts with the *top matter*, which contains the "title page" information. It follows the line:

```
\begin{document}
```

and concludes with the line

```
\maketitle
```

Here is the top matter of the introductory sample article:

```
\title{A construction of complete-simple\\
       distributive lattices}
\author{George~A. Menuhin\thanks{Research supported
   by the NSF under grant number~23466.}\\
   Computer Science Department\\
   University of Winnebago\\
   Winnebago, Minnesota 23714\\
   \texttt{menuhin@ccw.uwinnebago.edu}}
\date{March 15, 1995}
\maketitle
```

The body continues with an (optional) abstract, contained in an `abstract` environment:

```
\begin{abstract}
   In this note we prove that there exist \emph{complete-simple
   distributive lattices}, that is, complete distributive
   lattices in which there are only two complete congruences.
\end{abstract}
```

And here is the rest of the body of the introductory sample article:

```
\section{Introduction} \label{S:intro}
In this note we prove the following result:

\begin{theorem}
   There exists an infinite complete distributive lattice $K$
   with only the two trivial complete congruence relations.
\end{theorem}

\section{The $\Pi^{*}$ construction} \label{S:P*}
The following construction is crucial in our proof of our Theorem:

\begin{definition} \label{D:P*}
   Let $D_{i}$, $i \in I$, be complete distributive
   lattices satisfying condition~\textup{(J)}.  Their
   $\Pi^{*}$ product is defined as follows:
   \[
      \Pi^{*} ( D_{i} \mid i \in I ) =
       \Pi ( D_{i}^{-} \mid i \in I ) + 1;
   \]
   that is, $\Pi^{*} ( D_{i} \mid i \in I )$ is
   $\Pi ( D_{i}^{-} \mid i \in I )$ with a new unit element.
\end{definition}

\begin{notation}
   If $i \in I$ and $d \in D_{i}^{-}$, then
   \[
      \langle \dots, 0, \dots, \overset{i}{d}, \dots, 0,
       \dots \rangle
   \]
   is the element of $\Pi^{*} ( D_{i} \mid i \in I )$ whose
   $i$th component is $d$ and all the other components
   are $0$.
\end{notation}

See also Ernest~T. Moynahan~\cite{eM57a}.


Next we verify the following result:

\begin{theorem} \label{T:P*}
   Let $D_{i}$, $i \in I$, be complete distributive
   lattices satisfying condition~\textup{(J)}.  Let $\Theta$
   be a complete congruence relation on
```

```
   $\Pi^{*} ( D_{i} \mid i \in I )$.
   If there exists an $i \in I$ and a $d \in D_{i}$ with
   $d < 1_{i}$ such that for all $d \leq c < 1_{i}$,
   \begin{equation} \label{E:cong1}
      \langle \dots, 0, \dots,\overset{i}{d},
      \dots, 0, \dots \rangle \equiv \langle \dots, 0, \dots,
      \overset{i}{c}, \dots, 0, \dots \rangle \pmod{\Theta},
   \end{equation}
   then $\Theta = \iota$.
\end{theorem}

\emph{Proof.} Since
\begin{equation} \label{E:cong2}
   \langle \dots, 0, \dots, \overset{i}{d}, \dots, 0,
      \dots \rangle \equiv \langle \dots, 0, \dots,
      \overset{i}{c}, \dots, 0, \dots \rangle \pmod{\Theta},
\end{equation}
and $\Theta$ is a complete congruence relation, it follows
from condition~(C) that
\begin{align} \label{E:cong}
   & \langle \dots, \overset{i}{d}, \dots, 0,
    \dots \rangle \equiv\\
   &\qquad \qquad \quad \bigvee ( \langle \dots, 0, \dots,
   \overset{i}{c}, \dots, 0, \dots \rangle \mid d \leq c < 1 )
   \equiv 1 \pmod{\Theta}. \notag
\end{align}

Let $j \in I$, $j \neq i$, and let $a \in D_{j}^{-}$.
Meeting both sides of the congruence \eqref{E:cong2} with
$\langle \dots, 0, \dots, \overset{j}{a}, \dots, 0,
\dots \rangle$, we obtain

\begin{align} \label{E:comp}
   0 = & \langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots
      \rangle \wedge \langle \dots, 0, \dots, \overset{j}{a},
      \dots, 0, \dots \rangle \equiv\\
       &\langle \dots, 0, \dots, \overset{j}{a}, \dots, 0, \dots
      \rangle \pmod{\Theta}, \notag
\end{align}
Using the completeness of $\Theta$ and \eqref{E:comp},
we get:
\[
```

```
   0 \equiv \bigvee ( \langle \dots, 0, \dots, \overset{j}{a},
   \dots, 0,\dots\rangle \mid a \in D_{j}^{-} ) = 1 \pmod{\Theta},
\]
hence $\Theta = \iota$.

\begin{thebibliography}{9}
   \bibitem{sF90}
      Soo-Key Foo, \emph{Lattice constructions}, Ph.D. thesis,
      University of Winnebago, Winnebago MN, December 1990.
   \bibitem{gM68}
      George~A. Menuhin, \emph{Universal Algebra}, D.~van Nostrand,
      Princeton-Toronto-London-Mel\-bourne, 1968.
   \bibitem{eM57}
      Ernest~T. Moynahan, \emph{On a problem of M.~H. Stone}, Acta
      Math. Acad. Sci. Hungar. \textbf{8} (1957), 455--460.
   \bibitem{eM57a}
      Ernest~T. Moynahan, \emph{Ideals and congruence relations in
      lattices. II}, Magyar Tud. Akad. Mat. Fiz. Oszt. K\"{o}zl.
      \textbf{9} (1957), 417--434.
\end{thebibliography}
```

At the end of the body, the *bibliography* is typed between the lines

```
\begin{thebibliography}{9}
\end{thebibliography}
```

The argument "`9`" of the `thebibliography` environment tells LaTeX to make room for single digit numbering, since in this article there are fewer than 10 articles. In the typeset article, the bibliography is entitled "References".

Observe that we refer to condition (J) in the definition as `\textup{(J)}`. We do this so that if the text of the definition is emphasized (as it is), then `(J)` should still be typeset as (J) and not as *(J)*; see section 2.6.4 for the `\textup` command.

1.5.1 The typeset article

Here is the typeset introductory sample article (note that the equation numbers are on the right, the default in the `article` document class; elsewhere in this book you find the $\mathcal{AMS}$ default, equations on the left—see sections 7.1.2 and 8.4 on how to change the default).

A construction of complete-simple distributive lattices

George A. Menuhin*
Computer Science Department
Winnebago, Minnesota 23714
menuhin@ccw.uwinnebago.edu

March 15, 1995

Abstract

In this note we prove that there exist *complete-simple distributive lattices*, that is, complete distributive lattices in which there are only two complete congruences.

1 Introduction

In this note we prove the following result:

Theorem 1 *There exists an infinite complete distributive lattice K with only the two trivial complete congruence relations.*

2 The Π^* construction

The following construction is crucial in our proof of our Theorem:

Definition 1 *Let D_i, $i \in I$, be complete distributive lattices satisfying condition* (J)*. Their Π^* product is defined as follows:*

$$\Pi^*(D_i \mid i \in I) = \Pi(D_i^- \mid i \in I) + 1;$$

that is, $\Pi^*(D_i \mid i \in I)$ is $\Pi(D_i^- \mid i \in I)$ with a new unit element.

Notation 1 *If $i \in I$ and $d \in D_i^-$, then*

$$\langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle$$

is the element of $\Pi^*(D_i \mid i \in I)$ whose ith component is d and all the other components are 0.

*Research supported by the NSF under grant number 23466.

See also Ernest T. Moynahan [4].

Next we verify the following result:

Theorem 2 *Let D_i, $i \in I$, be complete distributive lattices satisfying condition* (J)*. Let Θ be a complete congruence relation on $\Pi^*(D_i \mid i \in I)$. If there exists an $i \in I$ and a $d \in D_i$ with $d < 1_i$ such that for all $d \leq c < 1_i$,*

$$\langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle \equiv \langle \dots, 0, \dots, \overset{i}{c}, \dots, 0, \dots \rangle \pmod{\Theta}, \tag{1}$$

then $\Theta = \iota$.

Proof. Since

$$\langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle \equiv \langle \dots, 0, \dots, \overset{i}{c}, \dots, 0, \dots \rangle \pmod{\Theta}, \tag{2}$$

and Θ is a complete congruence relation, it follows from condition (C) that

$$\begin{aligned} &\langle \dots, \overset{i}{d}, \dots, 0, \dots \rangle \equiv \\ &\qquad \bigvee (\langle \dots, 0, \dots, \overset{i}{c}, \dots, 0, \dots \rangle \mid d \leq c < 1) \equiv 1 \pmod{\Theta}. \end{aligned} \tag{3}$$

Let $j \in I$, $j \neq i$, and let $a \in D_j^-$. Meeting both sides of the congruence (2) with $\langle \dots, 0, \dots, \overset{j}{a}, \dots, 0, \dots \rangle$, we obtain

$$\begin{aligned} 0 = &\langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle \wedge \langle \dots, 0, \dots, \overset{j}{a}, \dots, 0, \dots \rangle \equiv \\ &\langle \dots, 0, \dots, \overset{j}{a}, \dots, 0, \dots \rangle \pmod{\Theta}, \end{aligned} \tag{4}$$

Using the completeness of Θ and (4), we get:

$$0 \equiv \bigvee (\langle \dots, 0, \dots, \overset{j}{a}, \dots, 0, \dots \rangle \mid a \in D_j^-) = 1 \pmod{\Theta},$$

hence $\Theta = \iota$.

References

[1] Soo-Key Foo, *Lattice Constructions*, Ph.D. thesis, University of Winnebago, Winnebago, MN, December 1990.

[2] George A. Menuhin, *Universal Algebra*, D. van Nostrand, Princeton-Toronto-London-Melbourne, 1968.

[3] Ernest T. Moynahan, *On a problem of M. H. Stone*, Acta Math. Acad. Sci. Hungar. **8** (1957), 455–460.

[4] Ernest T. Moynahan, *Ideals and congruence relations in lattices. II*, Magyar Tud. Akad. Mat. Fiz. Oszt. Közl. **9** (1957), 417–434.

1.6 Article templates

Before you start writing your first article, I suggest you create two article templates for your own use.

There are two templates for articles written in the `article` document class in this book: `article.tpl` for articles with one author and `article2.tpl` for articles with two authors.[2] You can find these in the `ftp` directory (see page 4). So copy `article.tpl` into the `work` directory or type it in as follows:

```
% Sample file: article.tpl
% Typeset with LaTeX format

\documentclass{article}
\usepackage{amsmath,amssymb}

\newtheorem{theorem}{Theorem}
\newtheorem{lemma}{Lemma}
\newtheorem{proposition}{Proposition}
\newtheorem{definition}{Definition}
\newtheorem{corollary}{Corollary}
\newtheorem{notation}{Notation}

\begin{document}
\title{%
   titleline1\\
   titleline2}
\author{name\thanks{support}\\
   addressline1\\
   addressline2\\
   addressline3}
\date{date}
\maketitle

\begin{abstract}
   abstract
\end{abstract}

\begin{thebibliography}{99}

\end{thebibliography}
\end{document}
```

[2] In section 8.3, we discuss a template file, `amsart.tpl`, for the $\mathcal{AMS}$ document class `amsart`.

Now copy `article2.tpl` into the `work` directory, or type it in. It is identical to `article.tpl` except for the argument of the `\author` command:

```
\author{name1\thanks{support1}\\
   address1line1\\
   address1line2\\
   address1line3
   \and
   name2\thanks{support2}\\
   address2line1\\
   address2line2\\
   address2line3}
```

Note the `\and` command; it separates the two authors.

Now let's customize the template files. Open `article.tpl` and save it under a name of your choosing; I saved it under the name `ggart.tpl` (in the `ftp` directory—see page 4). In this personalized template file, I edit the top matter:

```
\title{titleline1\\
       titleline2}
\author{G. Gr\"{a}tzer\thanks{Research supported by the
                              NSERC of Canada.}\\
   University of Manitoba\\
   Department of Mathematics\\
   Winnipeg, Man. R3T 2N2\\
   Canada}
\date{date}
```

I did not edit the `\title` lines because they change from article to article. There is also a personalized `ggart2.tpl` for two authors.

1.7 Your first article

Your first article will be typeset using the `article` document class. To start, open the personalized article template created in section 1.6, and save it under the name of your first article. The name must be `one word` (no spaces) ending with `.tex`.

1.7.1 Editing the top matter

Edit the top matter to contain the article information (title, date, and so on). Here are some simple rules to follow:

Rule ■ Top matter for the `article` document class

1. If the title is only one line long, then there is no `\\` in the argument of the `\title` command; otherwise, separate the lines of the title with `\\`. There is no `\\` at the end of the last line.
2. Separate the lines of the address with `\\`. There is no `\\` at the end of the last line.
3. `\thanks` places a footnote at the bottom of the first page. If it is not needed, delete it.
4. Multiple authors are separated by `\and`. There is only one `\author` command, and it contains all the information (name, address, support) about all the authors.
5. The `\title` command is the only compulsory command. The others are optional.
6. If there is no `\date` command, the current date will be shown. If you do not want a date, type the form `\date{}`; if you want a specific date, say February 21, 1995, write
   `\date{February 21, 1995}`

1.7.2 Sectioning

An article, as a rule, is divided into sections. To start the section entitled "Introduction", type

```
\section{Introduction} \label{S:intro}
```

`Introduction` is the title of the section, `S:intro` is the label. I use the convention that "`S:`" starts the label for a section. The number of the section is automatically assigned by LaTeX, and you can refer to this section number by `\ref{S:intro}`, as in

```
In section~\ref{S:intro}, we introduce ...
```

(the tilde ~ is an unbreakable space, it keeps the word "section" and the section number together—see section 2.4.3).

For instance, the section title of this section was typed as follows:

```
\section{Typing your first article} \label{S:FirstArticle}
```

A reference to this section is made by typing

```
\ref{S:FirstArticle}
```

Sections have subsections, and subsections have subsubsections, followed by paragraphs and subparagraphs. The corresponding commands are

```
\subsection    \subsubsection    \paragraph    \subparagraph
```

1.7.3 Invoking proclamations

In the preamble of `article.tpl`, you typed the theorem, lemma, proposition, definition, corollary, and notation proclamations. Each of these proclamations defines an environment. For example, type a theorem in a `theorem` environment; the body of the theorem (that is, the part of the source file that produces the theorem) is between the two lines:

```
\begin{theorem} \label{T:xxx}
```

and

```
\end{theorem}
```

where `T:xxx` is the label for the theorem. Of course, `xxx` should be somewhat descriptive of the contents of the theorem. The theorem number is automatically assigned by LaTeX, and it can be referenced by `\ref{T:xxx}` as in

```
it follows from Theorem~\ref{T:xxx}
```

(the tilde ~ keeps the word "Theorem" and the theorem number together—see section 2.4.3). I use the convention that the label for a theorem starts with "`T:`".

1.7.4 Inserting references

Finally, we discuss the bibliography. Below are typical entries for the most often used types of references: an article in a journal, a book, an article in a conference proceedings, an article (chapter) in a book, a Ph.D. thesis, and a technical report (see `inbibl.tpl` in the `ftp` directory).

```
\bibitem{eM57}
   Ernest~T. Moynahan, \emph{On a problem of M.~H. Stone},
    Acta Math. Acad. Sci. Hungar. \textbf{8} (1957), 455--460.

\bibitem{gM68}
   George~A. Menuhin, \emph{Universal Algebra}, D.~van Nostrand,
    Princeton-Toronto-London-Melbourne, 1968.

\bibitem{pK69}
```

```
   Peter~A. Konig, \emph{Composition of functions}, Proceedings
     of the Conference on Universal Algebra (Kingston, 1969).

\bibitem{hA70}
   Henry~H. Albert, \emph{Free torsoids}, Current Trends in
     Lattice Theory, D.~van Nostrand, 1970.

\bibitem{sF90}
   Soo-Key Foo, \emph{Lattice constructions}, Ph.D. thesis,
    University of Winnebago, 1990.

\bibitem{gF86}
   Grant~H. Foster, \emph{Computational complexity in lattice
    theory}, Tech. report, Carnegie Mellon University, 1986.
```

I use the convention that the label for the `\bibitem` consists of the initials of the author and the year of publication: a publication by Andrew B. Reich in 1987 would have the label `aR87` (the second publication would be `aR87a`). For joint publications, the label consists of the initials of the authors and the year of publication; for instance, a publication by John Bradford and Andrew B. Reich in 1987 would have the label `BR87`. Of course, you can use any label you choose (subject to the rule in section 6.4.2).

Suppose you want to include as the fifth item in the bibliography the following article:

John Bradford and Andrew B. Reich, *Duplexes in posets*, Proc. Amer. Math. Soc. **112** (1987), 115–125.

Modeling it after Moynahan's article, type it as:

```
\bibitem{BR87}
   John~Bradford and Andrew~B. Reich, \emph{Duplexes in posets},
    Proc. Amer. Math. Soc. \textbf{112} (1987), 115--125.
```

A reference to this article is made with `\cite{BR87}`, for instance:

this result was first published in [5]

typed as

```
this result was first published in~\cite{BR87}
```

Note that you have to arrange the references in the `thebibliography` environment in the order you wish to see them. LaTeX only takes care of the numbering and the citations in the text.

Tip The `thebibliography` environment properly handles periods. You do not have to mark periods for abbreviations (in the form `.\`—as discussed in section 2.2.2) in the name of a journal, so

```
Acta Math. Acad. Sci. Hungar.
```

is correct.

1.8 LaTeX error messages

You'll probably make a number of mistakes in your first article. The mistakes come in various forms:

- Typographical errors, which LaTeX will blindly typeset. View the typeset version, find the errors, and correct the source file.
- Errors in mathematical formulas or in the formatting of the text.
- Errors in your instructions—commands and environments—to LaTeX.

Let's look at some examples by introducing a number of errors in the source file of the `intrart.tex` introductory sample article and see what error messages occur.

Example 1 Go to line 21 (you do not have to count lines, since most editors have a "go to line" command) and remove the closing brace so it reads:

```
\begin{abstract
```

Upon typesetting `intrart.tex`, LaTeX informs you of a mistake:

```
Runaway argument?
{abstract
! Paragraph ended before \end was complete.
<to be read again>
                   \par
l.26
```

Line 26 of the file is the line after `\end{abstract}`. From the error message, you can tell that something is wrong with the `abstract` environment.

Example 2 Now correct line 21, go to line 25, change it from

```
\end{abstract}
```

to

```
\end{abstrac}
```

and typeset again. LaTeX will inform you:

```
! LaTeX Error: \begin{abstract} on input line 21
ended by \end{abstrac}.

l.25 \end{abstrac}
```

Pressing return, LaTeX will recover from this error.

Example 3 Instead of correcting the error in line 25, comment it out:

```
% \end{abstrac}
```

and introduce an additional error in line 67. This line presently reads:

```
   lattices satisfying condition~\textup{(J)}.  Let $\Theta$
```

Change `\Theta` to `\Teta`:

```
   lattices satisfying condition~\textup{(J)}.  Let $\Teta$
```

Typesetting the article now, the message is:

```
! Undefined control sequence.
l.67 ...xtup{(J)}.  Let $\Teta
                                $
```

and pressing return gives the message:

```
! LaTeX Error: \begin{abstract} on input line 21 ended
by \end{document}.

l.131 \end{document}
```

These two mistakes are easy to identify. `\Teta` is a typo for `\Theta`. Observe how LaTeX tries to match

```
\begin{abstract}
```

with

```
\end{document}
```

Undo the two changes (lines 25 and 67).

Example 4 In line 73, change

```
      \langle \dots, 0, \dots,\overset{i}{d},
```

to

```
      \langle \dots, 0, \dots,\overset{i}{d},
```

This results in the message:

```
Runaway argument?
\def \\{\@amsmath@err {\Invalid@@ \\}\@eha } \label {E\ETC.
! Paragraph ended before \equation was complete.
<to be read again>
                   \par
l.79
```

Line 79 is the blank line following `\end{theorem}`. LaTeX skipped over the defective construct `\overset` and the incomplete `equation` environment, indicating the error past the end of the `theorem` environment. The error message indicates that the error may have been caused by the new paragraph (`\par`). Of course, there can be no new paragraph in either the second argument of `\overset` or the displayed formula. The solution does not come easily except by isolating the last paragraph and investigating it.

Error messages from LaTeX are not always as helpful as one would like, but there is always some information to be gleaned from them. As a rule, the error message should at least inform you of the line number (or paragraph or formula) where the error was caught. Try to identify the structure that caused the error: a command, an environment, or so forth. Keep in mind that it could be quite far from the line where LaTeX indicated the error. Try reading the section of this book that describes that command or environment; it should help in correcting the error.

The next best defense is to isolate your problem. Create a `current.tex` file that is the same as the present article, except that there is only one paragraph in the `document` environment. When this paragraph is typeset correctly, cut and paste it into your source file. If there is only one paragraph in the document, the error is easier to find. If the error is of the type as in the last example, split the paragraph into smaller paragraphs. See also section 2.5 on how to use the `comment` environment for finding errors.

1.9 Logical and visual design

This book attempts to show how to typeset an article, **not** how to write it. Nevertheless, it seems appropriate to point out some approaches to article design.

The typeset version of our `intrart.tex` introductory sample article (pp. 39–40) looks impressive. (For another example of a typeset article, see `sampart.tex` on pp. 361–363.) To produce an article like this, you have to realize that there are two aspects of article design: the *visual* and the *logical*. Let's borrow an example from the sample article to illustrate this: a theorem. You tell LaTeX to typeset a theorem and number it. Here is how you type the theorem:

```
\begin{theorem} \label{T:P*}
```

```
   Let $D_{i}$, $i \in I$, be complete distributive
   lattices satisfying condition~\textup{(2)}.  Let $\Theta$
   be a complete congruence relation on
   $\Pi^{*} ( D_{i} \mid i \in I )$.
   If there exists an $i \in I$ and a $d \in D_{i}$ with
   $d < 1_{i}$ such that for all $d \leq c < 1_{i}$,
   \begin{equation} \label{E:cong1}
      \langle \dots, 0, \dots,\overset{i}{d},
      \dots, 0, \dots \rangle \equiv \langle \dots, 0, \dots,
      \overset{i}{c}, \dots, 0, \dots \rangle \pmod{\Theta},
   \end{equation}
   then $\Theta = \iota$.
\end{theorem}
```

You find the typeset form on page 40.

The logical design is the theorem itself, which is placed in the `theorem` environment. For the visual design, LaTeX makes literally hundreds of decisions: the vertical space before and after the theorem; the bold **Theorem** heading and its numbering; the vertical space before and after the equation, and its numbering; the spacing of all the math symbols (inline and displayed formulas are spaced differently); the text of the theorem to be emphasized; and so on.

The decisions were made by professional designers, whose expertise is hidden in TeX itself, in LaTeX, in the document class, and in the packages. Could you have typeset this theorem yourself? Probably not. Aesthetic decisions are difficult for lay people to make. But even if you could have guessed the correct spacing, you would have faced the problem of consistency (guaranteeing that the next theorem will look the same), and just as importantly, you would have spent a great deal of time and energy on the *visual design* of the theorem, as opposed to the *logical design*. The idea is to concentrate on the logical design and let LaTeX take care of the visual design.

This approach has the advantage that by changing the document class (or its options; see sections 7.1.2 and 8.4), the visual design can be changed. If you code the visual design into the article ("hard coding" it, as a programmer would say), it's very difficult to change.

LaTeX uses four major tools to separate the logical and visual designs of an article:

Commands Information is given to LaTeX as arguments of commands; it's up to LaTeX to process the information. For instance, the title page information (especially in the `amsart` document class) is given in this form; the organization of the title page is completely up to the document class and its options.

A more subtle example is the use of a command for distinguishing a term or

notation. For instance, you may want to use an `\env` command for environment names. You may define `\env` as follows (`\newcommand` is explained in section 9.1.1):

```
\newcommand{\env}[1]{\texttt{#1}}
```

which typesets all environment names in typewriter style (see section 2.6.2). Logically, you have decided that an environment name should be marked up. Visually, you may change the decision any time. By changing the definition to

```
\newcommand{\env}[1]{\textbf{#1}}
```

all environment names will be typeset in bold (see section 2.6.7).

The following more mathematical example is taken from `sampart2.tex` (see Appendix D and the `ftp` directory). This article defines the construct $D^{\langle 2 \rangle}$ with the command

```
\newcommand{\Ds}{D^{\langle 2 \rangle}}
```

If a referee (or coauthor) suggests a different notation, changing this *one line* will carry out the change throughout the whole article.

Environments Important logical structures are placed in environments. For instance, you can give a list as an environment by saying that this is a list and these are the items (see section 3.1). Again, exactly how the list is typeset is up to LaTeX; you can even switch from one list type to another by just changing the name of the environment.

Proclamations These define numbered environments. If the amsthm package is used, you can further specify which one of three styles to use for typesetting; at any time you can change the style or the numbering scheme in the preamble (see the typeset `sampart.tex` on pages 361–363 for examples of proclamations printed in the three styles).

Cross-referencing Since theorems and sections are logical units, they can be freely moved around. This gives tremendous freedom in reorganizing the source file to improve the logical design.

You write articles to communicate. The closer you get to a separation of logical and visual design, the more you are able to concentrate on communicating your ideas. Of course, you can never quite reach this ideal. For instance, a "line too wide" warning (see sections 1.1.3 and 2.7.1) is a problem of visual design. When the journal changes the document class, unless the new document class retains the same fonts and line width, new "line too wide" problems arise. However, LaTeX is successful well over 95% of the time in solving visual design problems without your intervention. This is getting fairly close to the ideal.

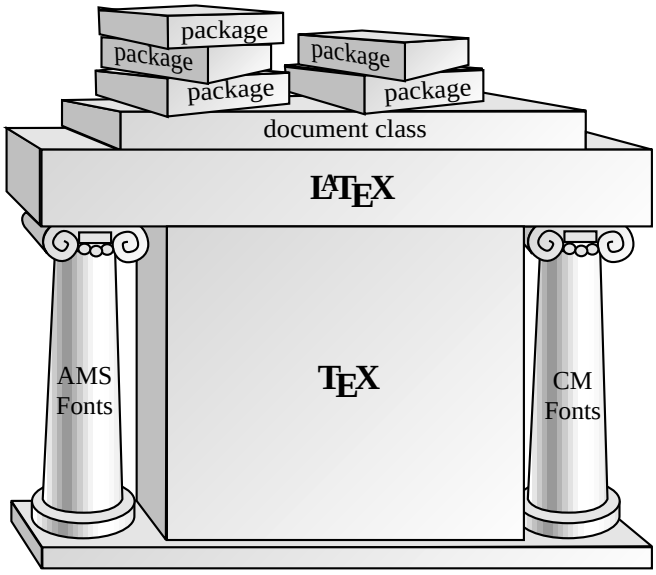

Figure 1.2: The structure of LaTeX

1.10 A brief overview

Having finished the short course, maybe it's time to pause and get a brief overview of how LaTeX works. As I pointed out in the Introduction, at the core of LaTeX is a *programming language* called TeX, providing many typesetting instructions. Along with TeX comes a set of fonts called *Computer Modern* (CM). The CM fonts and the TeX programming language form the foundation of a typical TeX system.

TeX is expandable, that is, additional commands can be defined in terms of more basic ones. One of the best known expansions of TeX is LaTeX; it introduces the idea of a *logical unit* that you read about in section 1.9.

Visual layout in LaTeX is determined by the *document class*; for example, you now have some familiarity with the `article` document class. Expansions of LaTeX are called *packages*; you have already come across the amssymb and amsmath packages.

The structure of LaTeX is illustrated in Figure 1.2. This figure suggests that, in order to work with a LaTeX document, you first have to install TeX and the CM fonts, then LaTeX, and finally specify the document class and the necessary packages. The AMSFonts font set is useful but it's not absolutely necessary.

Figure 1.2 illustrates my view of TEX and LATEX: it is the foundation on which many useful packages—extensions of LATEX—are built. It is essential that you understand the packages that make your work easier. An important example of this is the central focus of this book: typesetting math in LATEX. When typesetting math, invoke the amsmath package. In Part I, you invoke the amsmath package directly; in later parts of this book, I point out when a described feature needs the amsmath (or some other) package. The $\mathcal{AMS}$ document classes automatically load the amsmath and amsfonts packages.

1.11 Using LATEX

Figure 1.3 illustrates the steps taken to produce a typeset document. As illustrated in Figure 1.3, you open the source file or create a new one using an editor; call the source file `myart.tex`. Once the document is ready, typeset it with TEX using the `LaTeX` format. This step produces three files:

- `myart.dvi`, the typeset article in machine readable format;
- `myart.aux`, the auxiliary file; it is used by LATEX for internal "book keeping", including cross-referencing;
- `myart.log`, the log file; LATEX records the typesetting session in the log file, including the warnings and the errors.

Use a video driver to display the typeset article, `myart.dvi`, on the monitor, and a printer driver to print the typeset article, `myart.dvi` on a printer.

It should be emphasized that of the four programs used, only one (TEX) is the same for all computers and all implementations. If you use TEX in an "integrated environment", then all four programs appear as one.

1.11.1 $\mathcal{AMS}$-LATEX revisited

Now that you understand the structure of LATEX, we can again discuss $\mathcal{AMS}$-LATEX, a set of enhancements to LATEX by the $\mathcal{AMS}$. As outlined in the Introduction, the $\mathcal{AMS}$ enhancements to LATEX fall into three groups: the $\mathcal{AMS}$ math enhancements, the document classes, and the AMSFonts. Each consists of several packages.

An $\mathcal{AMS}$ document class automatically invokes the following $\mathcal{AMS}$ packages (see section 8.5 for a more detailed discussion and for the package interdependency diagram, Figure 8.3):

- amsmath, the main $\mathcal{AMS}$ math package;
- amsthm, proclamations with style and the `proof` environment;
- amsopn, operator names;
- amstext, the `\text` command;
- amsfonts, commands for math alphabets;
- amsbsy, bold symbol commands.

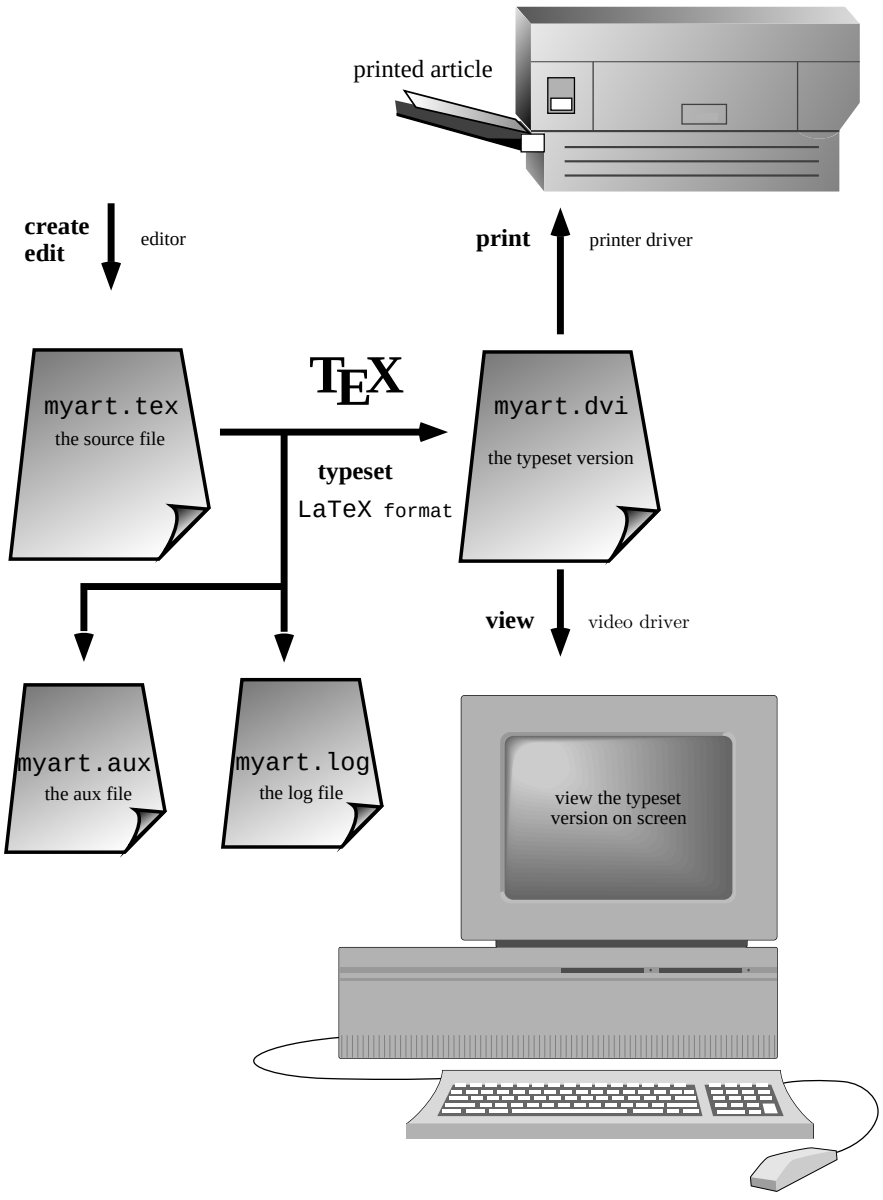

Figure 1.3: Using LaTeX

They do not automatically input the amssymb package, which provides the math symbol names. You can additionally input this and other $\mathcal{AMS}$-LaTeX or LaTeX packages as needed.

When we discuss a feature of LaTeX that requires a package, I point this out in the text. I do not always point out, however, the interdependencies of the document classes and of the packages. For instance, the `\text` command (section 2.9) is provided by the amstext package, which is loaded automatically by the amsmath package, which in turn is loaded automatically by each of the $\mathcal{AMS}$-LaTeX document classes. These interdependencies are discussed in section 8.5.

1.11.2 Interactive LaTeX

As a rule, LaTeX typesets an article non-interactively. Occasionally, you may want to use LaTeX interactively, that is, give LaTeX an instruction and ask it to carry it out. If LaTeX can't carry out your instructions, it displays a prompt:

- The `**` prompt means that LaTeX wants to know the name of a source file to typeset. Probably, you misspelled a name, or you are in the wrong directory.
- The `?` prompt asks "What should I do about the error I found?" Press return to continue; most of the time LaTeX recovers from the error, and completes the typesetting. If LaTeX can't recover from the error at the `?` prompt, press `X` to exit. Typing `H` instead may yield useful advice.
- The `*` signifies interactive mode: LaTeX is waiting for an instruction. To get to such a prompt, comment out the line

  ```
  \end{document}
  ```

  (by inserting `%` as the first character of the line) in the source file and typeset. Interactive instructions (such as `\show`—see section 9.1.6) may be given at the `*` prompt. Typing

  ```
  \end{document}
  ```

  at the `*` prompt exits LaTeX.

1.11.3 Files

A number of files are created when a document called, say, `myart.tex` is typeset. When the typesetting takes place, a number of messages appear on the monitor. These are stored in the *log file*, `myart.log`. The typeset document is written in the `myart.dvi` file. LaTeX also writes one or more auxiliary files, as necessary. The most important one is `myart.aux`, the `aux` file (see section E.2.4).

1.11.4 Versions

All components of LaTeX interact. Since all of them have many versions, make sure they are up-to-date and compatible. While writing this book, I used LaTeX 2_ε (LaTeX version 2e), issued on December 1, 1994. You can check the version numbers and dates by reading the first few lines of the files in an editor or by checking the dates shown on the file list discussed below.

LaTeX is updated every six months; in-between updates, the `ltpatch.ltx` document is posted periodically on the CTAN (see Appendix G). Get this file and place it in your TeX input directory. When you rebuild your formats, `ltpatch.ltx` will patch LaTeX.

When you typeset a LaTeX document, LaTeX introduces itself in the log file with a line such as

```
LaTeX2e <1994/12/01> patch level 3
```

giving you the release date and patch level. If you use a new feature of LaTeX that was introduced recently, place in the preamble of your document the command

```
\NeedsTeXFormat{LaTeX2e}[1994/12/01]
```

where the date is the release date of the version you must use.

As of this writing, $\mathcal{AMS}$-LaTeX is at version 1.2 and the AMSFonts font set is at version 2.2. See Appendix G on how to get updated versions of $\mathcal{AMS}$-LaTeX and the AMSFonts.

BibTeX is at version 0.99 (version 1.0 is expected soon). In this book, I use the `amsplain.bst` bibliographic style file (version 1.2a).

If you include the `\listfiles` command in the preamble of your document, the log file will contain a detailed listing of all the files used in the typesetting of your document.

Here are a few lines from such a listing:

```
*File List*
book.cls       1994/12/09 v1.2x Standard LaTeX document class
leqno.clo      1994/12/09 v1.2x Standard LaTeX option
bk10.clo       1994/12/09 v1.2x Standard LaTeX file (size option)
amsmath.sty    1995/02/23 v1.2b AMS math features
Ueus57.fd      1994/10/17 v2.2d AMS font definitions
latexsym.sty   1994/09/25 v2.1f Standard LaTeX package
xspace.sty     1994/11/15 v1.03 Space after command names (DPC)
Ulasy.fd       1994/09/25 v2.1f LaTeX symbol font definitions
**********
```

1.12 What's next?

Having read thus far, you probably know enough about LaTeX to write your first article. The best way to learn LaTeX is by experimentation. Later, you may want to read Parts II–V.

If you look at the source files of the sample articles, your first impression may be how very verbose LaTeX is. In actual practice, LaTeX is fairly easy to type. There are two basic tools to make typing LaTeX more efficient.

Firstly, you should have a good editor. For instance, you should be able to train your editor so that a single keystroke produces the text:

```
\begin{theorem} \label{T:}


\end{theorem}
```

with the cursor in the position following ":" (where you type the label).

Secondly, customizing LaTeX will make repetitious structures such as

```
\begin{equation}
   \langle \dots, 0, \dots, \overset{i}{d}, \dots, 0,
    \dots \rangle \equiv \langle
    \dots, 0, \dots, \overset{i}{c}, \dots, 0, \dots
    \rangle \pmod{\Theta},
\end{equation}
```

which prints

$$\langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle \equiv \langle \dots, 0, \dots, \overset{i}{c}, \dots, 0, \dots \rangle \pmod{\Theta}, \tag{3.1}$$

(see page 369) become much shorter and (with practice) more readable. Utilizing the user-defined commands `\con` (for congruence), `\vct` (for vector), and `\gQ` (for Greek theta), in `sampart2.tex` (in the `ftp` directory and in Appendix C), this formula becomes

```
\begin{equation}
   \con \vct{i}{d}=\vct{i}{c}(\gQ),
\end{equation}
```

which is about as long as the typeset formula itself.

The topic of user-defined commands is taken up in Part IV.

Finally, custom formats (section 9.7) substantially speed up the typesetting of an average document.

APPENDIX

A

Math symbol tables

A.1 Hebrew letters

Type:	Print:	Type:	Print:
`\aleph`	ℵ	`\beth`	ℶ
`\daleth`	ℸ	`\gimel`	ℷ

All symbols but `\aleph` need the amssymb package.

A.2 Greek characters

Type:	Print:	Type:	Print:	Type:	Print:
`\alpha`	α	`\beta`	β	`\gamma`	γ
`\digamma`	$\digamma$	`\delta`	δ	`\epsilon`	ϵ
`\varepsilon`	ε	`\zeta`	ζ	`\eta`	η
`\theta`	θ	`\vartheta`	ϑ	`\iota`	ι
`\kappa`	κ	`\varkappa`	$\varkappa$	`\lambda`	λ
`\mu`	μ	`\nu`	ν	`\xi`	ξ
`\pi`	π	`\varpi`	ϖ	`\rho`	ρ
`\varrho`	ϱ	`\sigma`	σ	`\varsigma`	ς
`\tau`	τ	`\upsilon`	υ	`\phi`	ϕ
`\varphi`	φ	`\chi`	χ	`\psi`	ψ
`\omega`	ω				

`\digamma` and `\varkappa` require the amssymb package.

Type:	Print:	Type:	Print:
`\Gamma`	Γ	`\varGamma`	$\varGamma$
`\Delta`	Δ	`\varDelta`	$\varDelta$
`\Theta`	Θ	`\varTheta`	$\varTheta$
`\Lambda`	Λ	`\varLambda`	$\varLambda$
`\Xi`	Ξ	`\varXi`	$\varXi$
`\Pi`	Π	`\varPi`	$\varPi$
`\Sigma`	Σ	`\varSigma`	$\varSigma$
`\Upsilon`	Υ	`\varUpsilon`	$\varUpsilon$
`\Phi`	Φ	`\varPhi`	$\varPhi$
`\Psi`	Ψ	`\varPsi`	$\varPsi$
`\Omega`	Ω	`\varOmega`	$\varOmega$

All symbols whose name begins with `var` need the amsmath package.

A.3 LaTeX binary relations

Type:	Print:	Type:	Print:
`\in`	$\in$	`\ni`	$\ni$
`\leq`	$\leq$	`\geq`	$\geq$
`\ll`	$\ll$	`\gg`	$\gg$
`\prec`	$\prec$	`\succ`	$\succ$
`\preceq`	$\preceq$	`\succeq`	$\succeq$
`\sim`	$\sim$	`\cong`	$\cong$
`\simeq`	$\simeq$	`\approx`	$\approx$
`\equiv`	$\equiv$	`\doteq`	$\doteq$
`\subset`	$\subset$	`\supset`	$\supset$
`\subseteq`	$\subseteq$	`\supseteq`	$\supseteq$
`\sqsubseteq`	$\sqsubseteq$	`\sqsupseteq`	$\sqsupseteq$
`\smile`	$\smile$	`\frown`	$\frown$
`\perp`	$\perp$	`\models`	$\models$
`\mid`	$\mid$	`\parallel`	$\parallel$
`\vdash`	$\vdash$	`\dashv`	$\dashv$
`\propto`	$\propto$	`\asymp`	$\asymp$
`\bowtie`	$\bowtie$		
`\sqsubset`	$\sqsubset$	`\sqsupset`	$\sqsupset$
`\Join`	$\Join$		

The latter three symbols need the latexsym package.

A.4 $\mathcal{AMS}$ binary relations

Type:	Print:	Type:	Print:
\leqslant	$\leqslant$	\geqslant	$\geqslant$
\eqslantless	$\eqslantless$	\eqslantgtr	$\eqslantgtr$
\lesssim	$\lesssim$	\gtrsim	$\gtrsim$
\lessapprox	$\lessapprox$	\gtrapprox	$\gtrapprox$
\approxeq	$\approxeq$		
\lessdot	$\lessdot$	\gtrdot	$\gtrdot$
\lll	$\lll$	\ggg	$\ggg$
\lessgtr	$\lessgtr$	\gtrless	$\gtrless$
\lesseqgtr	$\lesseqgtr$	\gtreqless	$\gtreqless$
\lesseqqgtr	$\lesseqqgtr$	\gtreqqless	$\gtreqqless$
\doteqdot	$\doteqdot$	\eqcirc	$\eqcirc$
\circeq	$\circeq$	\fallingdotseq	$\fallingdotseq$
\risingdotseq	$\risingdotseq$	\triangleq	$\triangleq$
\backsim	$\backsim$	\thicksim	$\thicksim$
\backsimeq	$\backsimeq$	\thickapprox	$\thickapprox$
\preccurlyeq	$\preccurlyeq$	\succcurlyeq	$\succcurlyeq$
\curlyeqprec	$\curlyeqprec$	\curlyeqsucc	$\curlyeqsucc$
\precsim	$\precsim$	\succsim	$\succsim$
\precapprox	$\precapprox$	\succapprox	$\succapprox$
\subseteqq	$\subseteqq$	\supseteqq	$\supseteqq$
\Subset	$\Subset$	\Supset	$\Supset$
\vartriangleleft	$\vartriangleleft$	\vartriangleright	$\vartriangleright$
\trianglelefteq	$\trianglelefteq$	\trianglerighteq	$\trianglerighteq$
\vDash	$\vDash$	\Vdash	$\Vdash$
\Vvdash	$\Vvdash$		
\smallsmile	$\smallsmile$	\smallfrown	$\smallfrown$
\shortmid	$\shortmid$	\shortparallel	$\shortparallel$
\bumpeq	$\bumpeq$	\Bumpeq	$\Bumpeq$
\between	$\between$	\pitchfork	$\pitchfork$
\varpropto	$\varpropto$	\backepsilon	$\backepsilon$
\blacktriangleleft	$\blacktriangleleft$	\blacktriangleright	$\blacktriangleright$
\therefore	$\therefore$	\because	$\because$

All symbols require the amssymb package.

A.5 $\mathcal{AMS}$ negated binary relations

Type:	Print:	Type:	Print:
`\ne`	$\ne$	`\notin`	$\notin$
`\nless`	$\nless$	`\ngtr`	$\ngtr$
`\nleq`	$\nleq$	`\ngeq`	$\ngeq$
`\nleqslant`	$\nleqslant$	`\ngeqslant`	$\ngeqslant$
`\nleqq`	$\nleqq$	`\ngeqq`	$\ngeqq$
`\lneq`	$\lneq$	`\gneq`	$\gneq$
`\lneqq`	$\lneqq$	`\gneqq`	$\gneqq$
`\lvertneqq`	$\lvertneqq$	`\gvertneqq`	$\gvertneqq$
`\lnsim`	$\lnsim$	`\gnsim`	$\gnsim$
`\lnapprox`	$\lnapprox$	`\gnapprox`	$\gnapprox$
`\nprec`	$\nprec$	`\nsucc`	$\nsucc$
`\npreceq`	$\npreceq$	`\nsucceq`	$\nsucceq$
`\precneqq`	$\precneqq$	`\succneqq`	$\succneqq$
`\precnsim`	$\precnsim$	`\succnsim`	$\succnsim$
`\precnapprox`	$\precnapprox$	`\succnapprox`	$\succnapprox$
`\nsim`	$\nsim$	`\ncong`	$\ncong$
`\nshortmid`	$\nshortmid$	`\nshortparallel`	$\nshortparallel$
`\nmid`	$\nmid$	`\nparallel`	$\nparallel$
`\nvdash`	$\nvdash$	`\nvDash`	$\nvDash$
`\nVdash`	$\nVdash$	`\nVDash`	$\nVDash$
`\ntriangleleft`	$\ntriangleleft$	`\ntriangleright`	$\ntriangleright$
`\ntrianglelefteq`	$\ntrianglelefteq$	`\ntrianglerighteq`	$\ntrianglerighteq$
`\nsubseteq`	$\nsubseteq$	`\nsupseteq`	$\nsupseteq$
`\nsubseteqq`	$\nsubseteqq$	`\nsupseteqq`	$\nsupseteqq$
`\subsetneq`	$\subsetneq$	`\supsetneq`	$\supsetneq$
`\varsubsetneq`	$\varsubsetneq$	`\varsupsetneq`	$\varsupsetneq$
`\subsetneqq`	$\subsetneqq$	`\supsetneqq`	$\supsetneqq$
`\varsubsetneqq`	$\varsubsetneqq$	`\varsupsetneqq`	$\varsupsetneqq$

All symbols but `\ne` require the amssymb package.

A.6 Binary operations

Type:	Print:	Type:	Print:
\pm	$\pm$	\mp	$\mp$
\times	$\times$	\cdot	$\cdot$
\circ	$\circ$	\bigcirc	$\bigcirc$
\div	$\div$	\diamond	$\diamond$
\ast	$\ast$	\star	$\star$
\cap	$\cap$	\cup	$\cup$
\sqcap	$\sqcap$	\sqcup	$\sqcup$
\wedge	$\wedge$	\vee	$\vee$
\triangleleft	$\triangleleft$	\triangleright	$\triangleright$
\bigtriangleup	$\bigtriangleup$	\bigtriangledown	$\bigtriangledown$
\oplus	$\oplus$	\ominus	$\ominus$
\otimes	$\otimes$	\oslash	$\oslash$
\odot	$\odot$	\bullet	$\bullet$
\dagger	$\dagger$	\ddagger	$\ddagger$
\setminus	$\setminus$	\uplus	$\uplus$
\wr	$\wr$	\amalg	$\amalg$
\lhd	$\lhd$	\rhd	$\rhd$
\unlhd	$\unlhd$	\unrhd	$\unrhd$
\dotplus	$\dotplus$	\centerdot	$\centerdot$
\ltimes	$\ltimes$	\rtimes	$\rtimes$
\leftthreetimes	$\leftthreetimes$	\rightthreetimes	$\rightthreetimes$
\circleddash	$\circleddash$	\smallsetminus	$\smallsetminus$
\barwedge	$\barwedge$	\doublebarwedge	$\doublebarwedge$
\curlywedge	$\curlywedge$	\curlyvee	$\curlyvee$
\veebar	$\veebar$	\intercal	$\intercal$
\Cap	$\Cap$	\Cup	$\Cup$
\circledast	$\circledast$	\circledcirc	$\circledcirc$
\boxminus	$\boxminus$	\boxtimes	$\boxtimes$
\boxdot	$\boxdot$	\boxplus	$\boxplus$
\divideontimes	$\divideontimes$		
\And	$\And$		

This table is divided into four parts. The first part contains the binary operations in LaTeX. The second part requires the latexsym package. The third part contains the $\mathcal{AMS}$ additions; they require the amssymb package. The symbol \And requires the amsmath package.

A.7 Arrows

Type:	Print:	Type:	Print:
`\leftarrow`	$\leftarrow$	`\rightarrow` or `\to`	$\rightarrow$
`\longleftarrow`	$\longleftarrow$	`\longrightarrow`	$\longrightarrow$
`\Leftarrow`	$\Leftarrow$	`\Rightarrow`	$\Rightarrow$
`\Longleftarrow`	$\Longleftarrow$	`\Longrightarrow`	$\Longrightarrow$
`\leftrightarrow`	$\leftrightarrow$	`\longleftrightarrow`	$\longleftrightarrow$
`\Leftrightarrow`	$\Leftrightarrow$	`\Longleftrightarrow`	$\Longleftrightarrow$
`\uparrow`	$\uparrow$	`\downarrow`	$\downarrow$
`\Uparrow`	$\Uparrow$	`\Downarrow`	$\Downarrow$
`\updownarrow`	$\updownarrow$	`\Updownarrow`	$\Updownarrow$
`\nearrow`	$\nearrow$	`\searrow`	$\searrow$
`\swarrow`	$\swarrow$	`\nwarrow`	$\nwarrow$
`\mapsto`	$\mapsto$	`\longmapsto`	$\longmapsto$
`\hookleftarrow`	$\hookleftarrow$	`\hookrightarrow`	$\hookrightarrow$
`\leftharpoonup`	$\leftharpoonup$	`\rightharpoonup`	$\rightharpoonup$
`\leftharpoondown`	$\leftharpoondown$	`\rightharpoondown`	$\rightharpoondown$
`\rightleftharpoons`	$\rightleftharpoons$		
`\leadsto`	$\leadsto$		
`\leftleftarrows`	$\leftleftarrows$	`\rightrightarrows`	$\rightrightarrows$
`\leftrightarrows`	$\leftrightarrows$	`\rightleftarrows`	$\rightleftarrows$
`\Lleftarrow`	$\Lleftarrow$	`\Rrightarrow`	$\Rrightarrow$
`\twoheadleftarrow`	$\twoheadleftarrow$	`\twoheadrightarrow`	$\twoheadrightarrow$
`\leftarrowtail`	$\leftarrowtail$	`\rightarrowtail`	$\rightarrowtail$
`\looparrowleft`	$\looparrowleft$	`\looparrowright`	$\looparrowright$
`\upuparrows`	$\upuparrows$	`\downdownarrows`	$\downdownarrows$
`\upharpoonleft`	$\upharpoonleft$	`\upharpoonright`	$\upharpoonright$
`\downharpoonleft`	$\downharpoonleft$	`\downharpoonright`	$\downharpoonright$
`\leftrightsquigarrow`	$\leftrightsquigarrow$	`\rightsquigarrow`	$\rightsquigarrow$
`\multimap`	$\multimap$		
`\nleftarrow`	$\nleftarrow$	`\nrightarrow`	$\nrightarrow$
`\nLeftarrow`	$\nLeftarrow$	`\nRightarrow`	$\nRightarrow$
`\nleftrightarrow`	$\nleftrightarrow$	`\nLeftrightarrow`	$\nLeftrightarrow$

This table is divided into three parts. The top part contains the symbols provided by LaTeX; the last command, `\leadsto`, requires the latexsym package. The middle table contains the $\mathcal{AMS}$ arrows; they all require the amssymb package. The bottom table lists the negated arrow symbols; they also require amssymb.

A.8 Miscellaneous symbols

Type:	Print:	Type:	Print:
`\hbar`	$\hbar$	`\ell`	ℓ
`\imath`	$\imath$	`\jmath`	$\jmath$
`\wp`	$\wp$	`\Re`	$\Re$
`\Im`	$\Im$	`\partial`	∂
`\infty`	∞	`\prime`	$\prime$
`\emptyset`	$\emptyset$	`\backslash`	$\backslash$
`\forall`	$\forall$	`\exists`	$\exists$
`\smallint`	$\smallint$	`\triangle`	$\triangle$
`\surd`	$\surd$	`\Vert`	$\Vert$
`\top`	$\top$	`\bot`	$\bot$
`\P`	$\P$	`\S`	$\S$
`\dag`	$\dagger$	`\ddag`	$\ddagger$
`\flat`	$\flat$	`\natural`	$\natural$
`\sharp`	$\sharp$	`\angle`	$\angle$
`\clubsuit`	$\clubsuit$	`\diamondsuit`	$\diamondsuit$
`\heartsuit`	$\heartsuit$	`\spadesuit`	$\spadesuit$
`\neg`	$\neg$		
`\Box`	$\Box$	`\Diamond`	$\Diamond$
`\mho`	$\mho$		
`\hslash`	$\hslash$	`\complement`	$\complement$
`\backprime`	$\backprime$	`\vartriangle`	$\vartriangle$
`\Bbbk`	$\Bbbk$	`\varnothing`	$\varnothing$
`\diagup`	$\diagup$	`\diagdown`	$\diagdown$
`\blacktriangle`	$\blacktriangle$	`\blacktriangledown`	$\blacktriangledown$
`\triangledown`	$\triangledown$	`\Game`	$\Game$
`\square`	$\square$	`\blacksquare`	$\blacksquare$
`\lozenge`	$\lozenge$	`\blacklozenge`	$\blacklozenge$
`\measuredangle`	$\measuredangle$	`\sphericalangle`	$\sphericalangle$
`\circledS`	$\circledS$	`\bigstar`	$\bigstar$
`\Finv`	$\Finv$	`\eth`	$\eth$
`\nexists`	$\nexists$		

This table is divided into two parts. The top part contains the symbols provided by LaTeX; the last three commands require the latexsym package. The bottom table lists symbols from the $\mathcal{AMS}$; they all require the amssymb package.

A.9 Math spacing commands

Short form:	Full form:	Size:	Short form:	Full form:
`\,`	`\thinspace`	a	`\!`	`\negthinspace`
`\:`	`\medspace`	aa		`\negmedspace`
`\;`	`\thickspace`	aaa		`\negthickspace`
	`\quad`	aa aa		
	`\qquad`	aaaa aaaa		

The `\medspace`, `\thickspace`, `\negmedspace`, and `\negthickspace` commands require the amsmath package.

A.10 Delimiters

Name:	Type:	Print:	Name:	Type:	Print:
Left paren	`(`	(	Right paren	`)`	)
Left bracket	`[`	[	Right bracket	`]`	]
Left brace	`\{`	{	Right brace	`\}`	}
Reverse slash	`\backslash`	\	Forward slash	/	/
Left angle	`\langle`	⟨	Right angle	`\rangle`	⟩
Vertical line	`|`	|	Double vert. line	`\\|`	‖
Left floor	`\lfloor`	⌊	Right floor	`\rfloor`	⌋
Left ceiling	`\lceil`	⌈	Right ceiling	`\rceil`	⌉
Upper left corner	`\ulcorner`	⌜	Upper right corner	`\urcorner`	⌝
Lower left corner	`\llcorner`	⌞	Lower right corner	`\lrcorner`	⌟

The corners require the amsmath package.

Name:	Type:	Print:
Upward arrow	`\uparrow`	↑
Double upward arrow	`\Uparrow`	⇑
Downward arrow	`\downarrow`	↓
Double downward arrow	`\Downarrow`	⇓
Up-and-down arrow	`\updownarrow`	↕
Double up-and-down arrow	`\Updownarrow`	⇕

A.11 Operators

`\arccos`	`\arcsin`	`\arctan`	`\arg`
`\cos`	`\cosh`	`\cot`	`\coth`
`\csc`	`\dim`	`\exp`	`\hom`
`\ker`	`\lg`	`\ln`	`\log`
`\sec`	`\sin`	`\sinh`	`\tan`
`\tanh`			
`\varliminf`	`\varlimsup`	`\varinjlim`	`\varprojlim`

The `\var` commands require the amsmath package.

`\det`	`\gcd`	`\inf`	`\injlim`
`\lim`	`\liminf`	`\limsup`	`\max`
`\min`	`\projlim`	`\Pr`	`\sup`

The `\injlim` and `\projlim` commands require the amsmath package.

Type:	Inline	Displayed	Type:	Inline	Displayed
`\prod_{i=1}^{n}`	$\prod_{i=1}^{n}$	$\displaystyle\prod_{i=1}^{n}$	`\coprod_{i=1}^{n}`	$\coprod_{i=1}^{n}$	$\displaystyle\coprod_{i=1}^{n}$
`\bigcap_{i=1}^{n}`	$\bigcap_{i=1}^{n}$	$\displaystyle\bigcap_{i=1}^{n}$	`\bigcup_{i=1}^{n}`	$\bigcup_{i=1}^{n}$	$\displaystyle\bigcup_{i=1}^{n}$
`\bigwedge_{i=1}^{n}`	$\bigwedge_{i=1}^{n}$	$\displaystyle\bigwedge_{i=1}^{n}$	`\bigvee_{i=1}^{n}`	$\bigvee_{i=1}^{n}$	$\displaystyle\bigvee_{i=1}^{n}$
`\bigsqcup_{i=1}^{n}`	$\bigsqcup_{i=1}^{n}$	$\displaystyle\bigsqcup_{i=1}^{n}$	`\biguplus_{i=1}^{n}`	$\biguplus_{i=1}^{n}$	$\displaystyle\biguplus_{i=1}^{n}$
`\bigotimes_{i=1}^{n}`	$\bigotimes_{i=1}^{n}$	$\displaystyle\bigotimes_{i=1}^{n}$	`\bigoplus_{i=1}^{n}`	$\bigoplus_{i=1}^{n}$	$\displaystyle\bigoplus_{i=1}^{n}$
`\bigodot_{i=1}^{n}`	$\bigodot_{i=1}^{n}$	$\displaystyle\bigodot_{i=1}^{n}$	`\sum_{i=1}^{n}`	$\sum_{i=1}^{n}$	$\displaystyle\sum_{i=1}^{n}$

A.12 Math accents

`\hat{a}`	$\hat{a}$	`\Hat{a}`	$\hat{a}$	`\widehat{a}`	$\widehat{a}$	`a\sphat`	$a^{\frown}$
`\tilde{a}`	$\tilde{a}$	`\Tilde{a}`	$\tilde{a}$	`\widetilde{a}`	$\widetilde{a}$	`a\sptilde`	$a^{\sim}$
`\acute{a}`	$\acute{a}$	`\Acute{a}`	$\acute{a}$				
`\bar{a}`	$\bar{a}$	`\Bar{a}`	$\bar{a}$				
`\breve{a}`	$\breve{a}$	`\Breve{a}`	$\breve{a}$			`a\spbreve`	$a^{\smile}$
`\check{a}`	$\check{a}$	`\Check{a}`	$\check{a}$			`a\spcheck`	$a^{\vee}$
`\dot{a}`	$\dot{a}$	`\Dot{a}`	$\dot{a}$			`a\spdot`	$a^{\cdot}$
`\ddot{a}`	$\ddot{a}$	`\Ddot{a}`	$\ddot{a}$			`a\spddot`	$a^{\cdot\cdot}$
`\dddot{a}`	$\dddot{a}$					`a\spdddot`	$a^{\cdot\cdot\cdot}$
`\ddddot{a}`	$\ddddot{a}$						
`\grave{a}`	$\grave{a}$	`\Grave{a}`	$\grave{a}$	`\imath`	$\imath$		
`\vec{a}`	$\vec{a}$	`\Vec{a}`	$\vec{a}$	`\jmath`	$\jmath$		

The `\dddot` and `\ddddot` commands and all the capitalized commands require the amsmath package; the commands in the fourth column require the amsxtra package.

A.13 Math font commands

Type:	Print:
`\mathbf{A}`	$\mathbf{A}$
`\mathit{A}`	A
`\mathsf{A}`	A
`\mathrm{A}`	A
`\mathtt{A}`	$\mathtt{A}$
`\mathnormal{A}`	$\mathnormal{A}$
`\mathbb{A}`	$\mathbb{A}$
`\mathfrak{A}`	$\mathfrak{A}$
`\mathcal{A}`	$\mathcal{A}$
`\boldsymbol{\alpha}`	$\boldsymbol{\alpha}$

The `\mathbb`, `\mathfrak`, and `\mathcal` commands require the amsfonts package. The `\boldsymbol` command requires the amsbsy package.

APPENDIX

B

Text symbol tables

B.1 Special text characters

Type:	Print:	Type:	Print:	Type:	Print:
`\#`	#	`\$`	$	`\%`	%
`\&`	&	`\~{}`	~	`\_`	_
`\^{}`	^	`\{`	{	`\}`	}
`$\|$`	|	`@`	@	`$*$`	*
		`$\backslash$`	\		

B.2 Text accents

Type:	Print:	Type:	Print:	Type:	Print:
\‘{o}	ò	\’{o}	ó	\"{o}	ö
\H{o}	ő	\^{o}	ô	\~{o}	õ
\v{o}	ǒ	\u{o}	ŏ	\={o}	ō
\b{o}	o̲	\.{o}	ȯ	\d{o}	ọ
\c{o}	ǫ	\r{o}	o̊	\t{oo}	o͡o
\i	ı			\j	ȷ

B.3 Some European characters

Type:	Print:	Type:	Print:	Type:	Print:
\aa	å	\AA	Å	\ae	æ
\AE	Æ	\o	ø	\O	Ø
\oe	œ	\OE	Œ	\l	ł
\L	Ł	\ss	ß	\SS	SS
?‘	¿	!‘	¡		

B.4 Extra text symbols

Type:	Print:
\dag	†
\ddag	‡
\S	§
\P	¶
\copyright	©
\pounds	£
\textbullet	•
\textvisiblespace	␣
\textcircled{a}	ⓐ
\textperiodcentered	·

B.5 Text spacing commands

Short form:	Full form:	Size:	Short form:	Full form:
`\,`	`\thinspace`	a	`\!`	`\negthinspace`
`\:`	`\medspace`	aa		`\negmedspace`
`\;`	`\thickspace`	aaa		`\negthickspace`
	`\quad`	aaaa		
	`\qquad`	aaaaaaaa		

The `\medspace`, `\thickspace`, `\negmedspace`, and `\negthickspace` commands require the amsmath package.

B.6 Text font commands

command with argument	command declaration	switch to
`\textnormal{...}`	`{\normalfont ...}`	document font family
`\textrm{...}`	`{\rmfamily ...}`	roman font family
`\textsf{...}`	`{\sffamily ...}`	sans serif font family
`\texttt{...}`	`{\ttfamily ...}`	`typewriter style font family`
`\textup{...}`	`{\upshape ...}`	upright shape
`\textit{...}`	`{\itshape ...}`	*italic shape*
`\textsl{...}`	`{\slshape ...}`	*slanted shape*
`\textnormal{...}`	`{\normalfont ...}`	default font
`\textsc{...}`	`{\scshape ...}`	SMALL CAPITALS
`\emph{...}`	`{\em ...}`	*emphasis*
`\textbf{...}`	`{\bfseries ...}`	**bold** (extended)
`\textmd{...}`	`{\mdseries ...}`	normal weight and width

B.7 Text font size changes

`\tiny`	sample text
`\scriptsize`	sample text
`\footnotesize`	sample text
`\small`	sample text
`\normalsize`	sample text
`\large`	sample text
`\Large`	sample text
`\LARGE`	sample text
`\huge`	sample text
`\Huge`	sample text

B.8 $\mathcal{AMS}$ text font size changes

```
\Tiny
\large
\tiny
\Large
\SMALL

\normalsize

\LARGE
\Small
\huge
\small
\Huge
```

Afterword

This book is based on my earlier book *Math into TEX: A simple introduction to AMS-LATEX* [13]. Although the topic changed considerably, I borrowed a fair amount of material from that book.

So it may be appropriate to begin by thanking here those who helped me with the earlier book. Harry Lakser was extremely generous with his time; Michael Doob and Craig Platt assisted me with TEX and UNIX; and David Kelly and Arthur Gerhard read and commented on an early version of that manuscript. Michael Downes, Frank Mittelbach, and Ralph Freese read various drafts. Richard Ribstein read the third and fourth drafts very conscientiously.

The first draft of this new book was read for the publisher by

- David Carlisle (of the LATEX3 team)
- Michael J. Downes (the project leader of the AMS team)
- Fernando Q. Gouvêa (Colby College)
- Frank Mittelbach (the project leader of the LATEX3 team)
- Tobias Oetiker (De Montfort University)
- Nico A. F. M. Poppelier (Elsevier Science Publishers)

Together they produced a huge tutorial on LATEX for my benefit. I hope that I succeeded in passing on to you some of what I learned from them.

On February 8, 1995, a short announcement was posted on the Internet (in the `comp.text.tex` newsgroup) asking for volunteers to read the first draft. The response was overwhelming.

I received reports from the following volunteers:

- Jeff Adler (University of Chicago, Chicago, IL, USA)
- Helmer Aslaksen (National University of Singapore, Singapore, Republic of Singapore)
- Andrew Caird (University of Michigan Center for Parallel Computing, Ann Arbor, MI, USA)

- Michael Carley (Trinity College, Dublin, Ireland)
- Miroslav Dont (Czech Technical University, Prague, The Czech Republic)
- Simon P. Eveson (University of York, Heslington, York, England)
- Weiqi Gao (St. Louis, MO, USA)
- Suleyman Guleyupoglu (Concurrent Technologies Corporation, Johnstown, PA, USA)
- Peter Gruter (Laboratoir Kastler Brossel, Paris, France)
- Chris F.W. Hendriks (National Aerospace Laboratory, Amsterdam, The Netherlands)
- Mark Higgins (Global Seismology, British Geological Survey, Edinburgh, Scotland)
- Zhihui Huang (University of Michigan, Ann Arbor, MI, USA)
- David M. Jones (Information and Computation, MIT Laboratory for Computer Science, Cambridge, MA, USA)
- Alexis Kotte and John van der Koijk (University Hospital Utrecht, Utrecht, The Netherlands)
- Donal Lyons (Trinity College, Dublin, Ireland)
- Michael Lykke (Roskild, Denmark)
- Steve Niu (University of Toronto, Toronto, ON, Canada)
- Piet van Oostrum (Utrecht University, Utrecht, The Netherlands)
- Denis Roegel (CRIN, Nancy, France)
- Kevin Ruland (Washington University, St. Louis, MO, USA)
- Thomas R. Scavo (Syracuse, NY, USA)
- Peter Schmitt (University of Vienna, Vienna, Austria)
- Nandor Sieben (Arizona State University, Tempe, AZ, USA)
- Paul Thompson (Case Western Reserve University, Cleveland, OH, USA)
- Ronald M. Tol (University of Groningen, Groningen, The Netherlands)
- Ernst U. Wallenborn (Federal Institute of Technology, Zurich, Switzerland)
- Doug Webb (Knoxville, TN, USA)

There were many volunteers, ranging in expertise from users who wanted to learn more about LaTeX, to experts in charge of large LaTeX installations, to internationally known experts whose names are known to many LaTeX users; and ranging in background from graduate students, to professional mathematicians, computer scientists, chemical engineers, psychiatrists, and consultants. I would like to thank them all for their enthusiastic reports. They shared their learning and their teaching experiences. This has become a much better book for their contributions.

I also received carefully crafted reports on Chapter 10 from Oren Patashnik (Stanford University), the author of BibTeX.

Based on these reports (ranging in size from two pages to over thirty pages), the manuscript has been rewritten, most of it has been reorganized, and sections have been added or deleted. I felt that as a result of the major changes probably many new errors have been introduced. So the second draft was again sent to

three readers; Jeff Adler, Simon P. Eveson, and David M. Jones sent me 27 pages of reports, confirming my suspicions. My deepest appreciation to these three individuals for their excellent repeat performance.

In the meanwhile, Merry Obrecht Sawdey undertook the visual design of the book. She also lent a helping hand in the final typesetting of the book.

The manuscript then was sent to the technical editor, Thomas R. Scavo, who flooded it with red ink; it would be hard to overstate the importance of his work. The final version of the book was checked again by him.

Last but not least, I want to thank Edwin Beschler, who believed in the project from the very beginning.

Index

#, 5
\# (#), 356
$, 5
$ (inline math delimiter), 11
\$ ($), 356
%, 5, 6
    commenting out, 6
\% (%), 5, 356
&, 5
    alignment point, 32, 33
\& (&), 356
\' (´ accent), 357
(, 5
((math delimiter), 353
), 5
) (math delimiter), 353
*, 5
$*$ (∗), 356
@, 5
+, 5, 15
, (comma), 5
\, (thin space, also \thinspace), 353, 358
- (dash, hyphen, minus), 15
\- (optional hyphen), 8
-- (number ranges, en-dash), 10
--- (em-dash), 10
. (period), 5
\. (˙ accent), 357
... (ellipsis), 17
/ (math delimiter), 353
/ (slash), 5, 15
: (colon), 5
\: (medium space, also \medspace), 353, 358
; (semicolon), 5
\; (thick space, also \thickspace), 353, 358
<, 10
=, 5
\= (¯ accent), 357
>, 10
" (double quote), 5, 7
\" (¨ accent), 357
? (question mark), 5
?‘ (¿), 357
! (exclamation mark), 5
!‘ (¡), 357
\! (negative thin space, also \negthinspace), 353, 358
[, 5
[(math delimiter), 353
\[(start displayed math), 11
\, 5, 9
    start of command, 9
\ (math delimiter), 353
{, 5
{ (math delimiter), 353

\{ ({), 356
}, 5
} (math delimiter), 353
\} (}), 356
\\
    row / line separator, 18, 31–33
], 5
] (math delimiter), 353
\] (end displayed math), 11
^, 5
\^ (^ accent), 357
_ (underscore), 5, 15
_ (_ accent), 357
‘ (left quote), 5
’ (right quote), 5
|, 5, 10
$|$ (|), 356
| (math delimiter), 28, 353
\| (‖ math delimiter), 353
\~ (~ accent), 357
~, 5

\AA (Å), 357
\aa (å), 357
abstract environment, 36
abstract in article, 36
accent
    European, 10, 357
    math, 16, 355
accented character, 10, 357
\Acute (´ math accent), 355
\acute (´ math accent), 355
Jeff Adler, 416, 418
\AE (Æ), 357
\ae (å), 357
\aleph (ℵ), 345
align, 31
    annotated, 31, 32
    simple, 31
align (math environment), 31, 32
aligned multiline formula, 31
alignment point, 32, 33
\alpha (α), 346
Alt key, 5
\amalg (⨿), 347, 350
$\mathcal{AMS}$ document class, xxiii
amsart (document class), xxiii, 33, 41
amsbsy (package), 54
AMSFonts, 51, 52
amsfonts (package), xxiii, 12, 51, 54
$\mathcal{AMS}$-LaTeX, xx, xxii–xxiv, xxv, 23, 52–54
amsmath (package), 15–20, 23, 30–33, 35, 41, 50, 51, 54, 346, 350, 353–355, 358
amsopn (package), 54
amssymb (package), 12, 15, 20, 23, 35, 41, 54, 346–352
$\mathcal{AMS}$-TeX, xxv
amstext (package), 19, 54
amsthm (package), 50, 54
amsxtra (package), 355
\And (&), 350
\and, 42, 43
\angle ($\angle$), 352
annotated align, 31, 32
\approx ($\approx$), 347
\approxeq, 348
\arccos ($\arccos$ operator), 354
\arcsin ($\arcsin$ operator), 354
\arctan ($\arctan$ operator), 354
\arg ($\arg$ operator), 354
argument of command, 9, 11, 12, 14
    optional, 19
arithmetic operation, 15
arrow, 351
article, 34–46
    abstract, 36
    bibliography, 38–40
    body, 35
    design, 48
    preamble, 34–35
    sample
        intrart, xx, 34–40, 46, 48

`sampart`, xx–xxiii, 33, 49, 50
`sampart2`, 50, 56
sectioning, 43
template, 41–42
top matter, 35, 36, 41, 42, 43
`article` (document class), 34, 41, 42, 49, 51
`article.tpl`, 41
`article2.tpl`, 41
Helmer Aslaksen, 416
`\ast` (∗), 350
`\asymp` (≍), 347
aux file, 30, 55

`\b` (_ accent), 357
`\backepsilon` (϶), 348
`\backprime` (‵), 352
`\backsim` (∽), 348
`\backsimeq` (⋍), 348
`\backslash` (\), 352
`$\backslash$` (\), 356
`\backslash` (math delimiter), 353
`\Bar` (‾ math accent), 355
`\bar` (‾ math accent), 16, 27, 355
`\barwedge` (⊼), 350
`\Bbbk` (𝕜), 352
`\because` (∵), 348
Edwin Beschler, 418
`\beta` (β), 346
`\beth` (ℶ), 345
`\between` (≬), 348
`\bfseries`, 358
`\bibitem`, 30, 38, 41, 45
bibliography, 38–40
`\bigcap` (⋂ large operator), 354
`\bigcirc` (◯), 350
`\bigcup` (⋃ large operator), 23, 354
`\biggl`, 27
`\biggr`, 27
`\bigodot` (⨀ large operator), 354
`\bigoplus` (⨁ large operator), 354
`\bigotimes` (⨂ large operator), 354
`\bigsqcup` (⨆ large operator), 354
`\bigstar` (★), 352
`\bigtriangledown` (▽), 350
`\bigtriangleup` (△), 350
`\biguplus` (⨄ large operator), 354
`\bigvee` (⋁ large operator), 24, 25, 354
`\bigwedge` (⋀ large operator), 25, 354
binary operation, 350
binary relation, 348
negated, 349
`\binom`, 16, 21
binomial, 16
Blackboard bold math alphabet, xxiii, 24
`\blacklozenge` (⧫), 352
`\blacksquare` (■), 352
`\blacktriangle` (▲), 352
`\blacktriangledown` (▼), 352
`\blacktriangleleft` (◀), 348
`\blacktriangleright` (▶), 348
blank delimiter, 25
blank line
marking end of paragraph, 7
`bmatrix` (subsidiary math environment), 18
body of article, 35
`\bot` (⊥), 352
`\bowtie` (⋈), 347
`\Box` (□), 352
`\boxdot` (⊡), 350
`\boxminus` (⊟), 350
`\boxplus` (⊞), 350
brace
closing, 14
`\Breve` (˘ math accent), 355
`\breve` (˘ math accent), 355
`\bullet` (•), 350
`\Bumpeq` (≎), 348
`\bumpeq` (≏), 348

`\c` (¸ accent), 357
Andrew Caird, 416

calligraphic alphabet, 28
\Cap (⋒), 350
\cap (∩), 350
Michael Carley, 417
David Carlisle, xviii, 416
cases (subsidiary math environment), 33
\cdot (·), 15, 350
\cdots (⋯), 17
center, 9
\centerdot (∙), 350
centimeter, 10
character, 4
  accented, 10, 357
  European, 10, 357
  invalid, 5
  math, 10
  prohibited, 5
  special, 5, 356
  tab, 5, 7
\Check (ˇ math accent), 355
\check (ˇ math accent), 355
\chi (χ), 346
\circ (∘), 350
\circeq (≗), 348
\circledast (⊛), 350
\circledcirc (⊚), 350
\circleddash (⊝), 350
\circledS (Ⓢ), 352
\cite, 30, 45
\clubsuit (♣), 352
cm (dimensional unit), 10
CM fonts, 51
command
  argument, 9, 11, 12, 14
  start with \, 9
Command key, 5
commenting out, 6
\complement (∁), 352
computer, xxi
Computer Modern (CM) fonts, 51
\cong (≅), 347
congruence, 16
\coprod (∐ large operator), 354
\copyright (©), 357
\cos (cos operator), 354
\cosh (cosh operator), 354
\cot (cot operator), 354
\coth (coth operator), 354
cross-referencing, 30
\csc (csc operator), 354
Ctrl key, 5
\Cup (⋓), 350
\cup (∪), 350
\curlyeqprec (⋞), 348
\curlyeqsucc (⋟), 348
\curlyvee (⋎), 350
\curlywedge (⋏), 350
custom format, 57
customized
  preamble of article, 41–42
  top matter of article, 41–42

\d (̣ accent), 357
\dag († math symbol), 352
\dag († text symbol), 357
\dagger (†), 350
\daleth (ℸ), 345
dash, 10
  em-dash, 10
  en-dash, 10
\dashv (⊣), 347
\ddag (‡ math symbol), 352
\ddag (‡ text symbol), 357
\ddagger (‡), 350
\ddddot (⃜ math accent), 355
\dddot (⃛ math accent), 355
\Ddot (¨ math accent), 355
\ddot (¨ math accent), 355
delimiter, 16, 353
  blank, 25
\Delta (Δ), 346
\delta (δ), 346
\det (det operator), 354
\dfrac, 28

\diagdown (╲), 352
\diagup (╱), 352
\Diamond (◇), 352
\diamond (⋄), 350
\diamondsuit (♢), 352
\digamma (ϝ), 346
digit key, 4
\dim (dim operator), 354
displayed
  math, 11
\div (÷), 350
\divideontimes (⋇), 350
document class, xxii–xxiv, 6, 15, 34, 35, 42, 49, 51
  $\mathcal{AMS}$, xxiii
  amsart, xxiii, 33, 41
  article, 34, 41, 42, 49, 51
  option
    draft, 8
document (environment), 9, 20
\documentclass, 12, 15
Miroslav Dont, 417
Michael Doob, 416
\Dot (˙ math accent), 355
\dot (˙ math accent), 355
\doteq (≐), 347
\doteqdot (≑), 348
dotless i (ı), 357
dotless j (ȷ), 357
\dotplus (∔), 350
\dots (⋯ or . . .), 17
double quote, 5, 7
\doublebarwedge (⩞), 350
\Downarrow (⇓ math delimiter), 353
\Downarrow (⇓), 351
\downarrow (↓ math delimiter), 353
\downarrow (↓), 351
\downdownarrows (⇊), 351
Michael J. Downes, xviii, 416
\downharpoonleft (⇃), 351
\downharpoonright (⇂), 351
draft (document class option), 8
editor, 46, 51, 56
\ell (ℓ), 352
ellipsis (. . .), 17
\em, 358
em-dash (—), 10
\emph, 358
emphasized text, 9
\emptyset (∅), 352
en-dash (–), 10
enter (return) key, 5
environment, 4, 9
  abstract, 36
  document, 9, 20
  thebibliography, 38
\epsilon (ϵ), 346
\eqcirc (≖), 348
\eqref, 30
\eqslantgtr (⪖), 348
\eqslantless (⪕), 348
equation, 29–31
  labelled, 30
  referenced, 30
  tagged, 31
equation (math environment), 29–31
\equiv (≡), 16, 347
error message, 6, 13, 46–48
\errorcontextlines, 6
\eta (η), 346
\eth (ð), 352
eufrak (package), 23
Euler Script, xxiii
European accent, 10, 357
European character, 10, 357
\EuScript, 355
euscript (package), 355
Simon P. Eveson, 417, 418
exclamation mark, 5
\exists (∃), 352
\exp (exp operator), 354

\fallingdotseq (≒), 348
file

aux, 30, 55
log, **54**, 55
source, **3**, 6, 7, 9, 11, 22, 30, 44, 46, 48, 51, 54
\Finv (ⅎ), 352
\flat (♭), 352
flushleft (text environment), 4
flushright (text environment), 4, 9
font
Computer Modern (CM), 51
\footnotesize, 359
\forall (∀), 352
format
custom, 57
LaTeX, xxii, 6, 20
plain, 51
\frac, 15
fraction, 15
Fraktur math alphabet, xxiii, 23
Ralph Freese, 416
\frown (⌢), 347
ftp
directory, 4

gallery.tex, 22
\Game (⅁), 352
\Gamma (Γ), 346
\gamma (γ), 346
Weiqi Gao, 417
\gcd (gcd operator), 354
\geq (≥), 347
\geqslant (⩾), 348
Arthur Gerhard, 416
\gg (≫), 347
\ggg (⋙), 348
\gimel (ℷ), 345
\gnapprox (⪊), 349
\gneq (⪈), 349
\gneqq (≩), 349
\gnsim (⋧), 349
Fernando Q. Gouvêa, 416
\Grave (` math accent), 355
\grave (` math accent), 355
Greek alphabet, 346
Peter Gruter, 417
\gtrapprox (⪆), 348
\gtrdot (⋗), 348
\gtreqless (⋚), 348
\gtreqqless (⪌), 348
\gtrless (≷), 348
\gtrsim (≳), 348
Suleyman Guleyupoglu, 417
\gvertneqq (≩), 349

\H (˝ accent), 357
\Hat (ˆ math accent), 355
\hat (ˆ math accent), 16, 355
\hbar (ℏ), 352
\hdotsfor, 28
\heartsuit (♡), 352
Hebrew letters, 345
Peter Hendriks, 417
Mark Higgins, 417
\hom (hom operator), 354
\hookleftarrow (↩), 351
\hookrightarrow (↪), 351
horizontal space
math, 353
text, 358
\hslash (ℏ), 352
HTML (markup language), xxi
Zhihui Huang, 417
\Huge, 359
\huge, 359
hyphen, 5, 10
optional, 8

\i (ı), 357
\Im (ℑ), 352
\imath (ı), 352, 355
\in (∈), **347**
in (dimensional unit), 10
inch, 10
\inf (inf operator), 354
\infty (∞), 12, **352**

\injlim (inj lim operator), 354
inline
  math environment, 11
  math formula, 11
instruction
  to LaTeX, 9, 51
\int (∫), 4, 17, 28
integral, 17
interactive LaTeX, 54
\intercal (⊺), 350
intrart (sample article), xx, 34–40, 46, 48
invalid character, 5
\iota (ι), 346
\itshape, 358

\j (ȷ), 357
\jmath (𝚥), 352, 355
\Join (⋈), 347
David M. Jones, xviii, 417, 418

\kappa (κ), 346
David Kelly, 416
\ker (ker operator), 354
key, 4, 10
  Alt, 5
  Command, 5
  Ctrl, 5
  digit, 4
  enter (return), 5
  letter, 4
  Option, 5
  prohibited, 5
  return, 5
  space, 5
  special, 5, 356
  tab, 5, 7
Donald E. Knuth, xviii, xx, 416
John van der Koijk, 417
Alexis Kotte, 417

\L (Ł), 357
\l (ł), 357
label, 30, 43, 44
\label, 30, 43, 44
Harry Lakser, 416
\Lambda (Λ), 346
\lambda (λ), 346
\langle (⟨ math delimiter), 24, 353
\LARGE, 359
\Large, 359
\large, 359
large operator, 19, 354
LaTeX, 51
  format, xxii, 6, 20
  interactive mode, 54
LaTeX 2ε, xviii
latexsym (package), 347, 350–352
\lceil (⌈ math delimiter), 353
\ldots (. . .), 17
\leadsto (⇝), 351
\left, 17, 23, 24, 27
left single quote, 5, 7
\left(((math delimiter), 16, 24, 32
\left. (blank math delimiter), 25
\Leftarrow (⇐), 351
\leftarrow (←), 351
\leftarrowtail (↢), 351
\leftharpoondown (↽), 351
\leftharpoonup (↼), 351
\leftleftarrows (⇇), 351
\Leftrightarrow (⇔), 351
\leftrightarrow (↔), 351
\leftrightarrows (⇆), 351
\leftrightsquigarrow (↭), 351
\leftthreetimes (⋋), 350
\leq (≤), 347
\leqslant (⩽), 348
\lessapprox (⪅), 348
\lessdot (⋖), 348
\lesseqgtr (⋚), 348
\lesseqqgtr (⪋), 348
\lessgtr (≶), 348
\lesssim (≲), 348

letter key, 4
\lfloor ($\lfloor$ math delimiter), 353
\lg ($\lg$ operator), 354
\lhd ($\lhd$), 350
\lim ($\lim$ operator), 11, 17, 354
\liminf ($\liminf$ operator), 354
\limsup ($\limsup$ operator), 354
line in text
  too wide, 7
line separator (\\), 18, 31, 32
line too wide, 7
\listfiles, 55
\ll ($\ll$), 347
\Lleftarrow ($\Lleftarrow$), 351
\lll ($\lll$), 348
\ln ($\ln$ operator), 354
\lnapprox ($\lnapprox$), 349
\lneq ($\lneq$), 349
\lneqq ($\lneqq$), 349
\lnsim ($\lnsim$), 349
\log ($\log$ operator), 354
log file, 54, 55
logical unit, 49
\Longleftarrow ($\Longleftarrow$), 351
\longleftarrow ($\longleftarrow$), 351
\Longleftrightarrow ($\Longleftrightarrow$), 351
\longleftrightarrow ($\longleftrightarrow$), 351
\longmapsto ($\longmapsto$), 351
\Longrightarrow ($\Longrightarrow$), 351
\longrightarrow ($\longrightarrow$), 351
\looparrowleft ($\looparrowleft$), 351
\looparrowright ($\looparrowright$), 351
\lozenge ($\lozenge$), 352
\ltimes ($\ltimes$), 350
\lvertneqq ($\lvertneqq$), 349
Michael Lykke, 417
Donal Lyons, 417

\maketitle, 35
\mapsto ($\mapsto$), 23, 351
markup language, xx
  HTML, xxi
math, 10–33
  accent, 16, 355
  character, 10
  displayed, 11
  inline, 11
  symbol, 346–355
math environment
  align, 31, 32
  annotated align, 31, 32
  equation, 29–31
  inline, 11
  simple align, 31
  subsidiary, 33
math font
  AMSFonts, xxiii, 51, 52
  Blackboard bold, xxiii, 24
  calligraphic, 28
  Euler Script, xxiii
  Fraktur, xxiii, 23
math.tex (sample file), 11, 12
mathb.tex (sample file), 12, 13
\mathbb, 24, 355
\mathbf, 355
\mathcal, 355
\mathfrak, 355
\mathit, 355
\mathrm, 355
\mathsf, 355
\mathtt, 355
matrix (subsidiary math environment), 18
\max ($\max$ operator), 354
\mbox, 19
\mdseries, 358
\measuredangle ($\measuredangle$), 352
\medspace (medium space, also \:), 353, 358
\mho ($\mho$), 352
\mid ($\mid$), 23, 347
\min ($\min$ operator), 354
minus, 15
Frank Mittelbach, xviii, 416
\models ($\models$), 347

\mp (∓), 350
\mu (μ), 346
multiline formula, 31
  annotated aligned, 32
  simple align, 31
\multimap (⊸), 351
multiplication, 15

\natural (♮), 352
\ncong (≇), 349
\ne (≠), 349
\nearrow (↗), 351
\neg (¬), 352
negated binary relation, 349
\negmedspace (negative medium space), 353, 358
\negthickspace (negative thick space), 353, 358
\negthinspace (negative thin space, also \!), 353, 358
\nexists (∄), 352
\ngeq (≱), 349
\ngeqq (≱), 349
\ngeqslant (⩾̸), 349
\ngtr (≯), 349
\ni (∋), 347
Steve Niu, 417
\nLeftarrow (⇍), 351
\nleftarrow (↚), 351
\nLeftrightarrow (⇎), 351
\nleftrightarrow (↮), 351
\nleq (≰), 349
\nleqq (≰), 349
\nleqslant (⩽̸), 349
\nless (≮), 349
\nmid (∤), 349
\normalsize, 359
\notag, 32
note1.tex (sample file), 6, 7
note1b.tex (sample file), 7, 8
note2.tex (sample file), 9
noteslug.tex (sample file), 8
\notin (∉), 349
\nparallel (∦), 349
\nprec (⊀), 349
\npreceq (⋠), 349
\nRightarrow (⇏), 351
\nrightarrow (↛), 351
\nshortmid (∤), 349
\nshortparallel (∦), 349
\nsim (≁), 349
\nsubseteq (⊈), 349
\nsubseteqq (⊈), 349
\nsucc (⊁), 349
\nsucceq (⋡), 349
\nsupseteq (⊉), 349
\nsupseteqq (⊉), 349
nth root, 19
\ntriangleleft (⋪), 349
\ntrianglelefteq (⋬), 349
\ntriangleright (⋫), 349
\ntrianglerighteq (⋭), 349
\nu (ν), 346
number range, 10
\nVDash (⊯), 349
\nVdash (⊮), 349
\nvDash (⊭), 349
\nvdash (⊬), 349
\nwarrow (↖), 351

\O (Ø), 357
\o (ø), 357
\odot (⊙), 350
\OE (Œ), 357
\oe (œ), 357
Tobias Oetiker, 416
\Omega (Ω), 346
\omega (ω), 346
\ominus (⊖), 350
Piet van Oostrum, 417
operation
  arithmetic, 15
operator, 17, 354
  large, 19, 354
\oplus (⊕), 350
Option key, 5

optional
argument, 19
hyphen, 8
\oslash (⊘), 350
\otimes (⊗), 350
\overbrace, 26
Overfull \hbox, 7, 8
overline, 27, 28
\overline, 27, 28
\overset, 25, 26, 38, 48

\P (¶ math symbol), 352
\P (¶ text symbol), 357
packages
amsbsy, 54
amsfonts, xxiii, 12, 51, 54
amsmath, 15–20, 23, 30–33, 35, 41, 50, 51, 54, 346, 350, 353–355, 358
amsopn, 54
amssymb, 12, 15, 20, 23, 35, 41, 54, 346–352
amstext, 19, 54
amsthm, 50, 54
amsxtra, 355
eufrak, 23
euscript, 355
latexsym, 347, 350–352
paragraph
end of, 7
\parallel (∥), 347
parentheses, 5
\partial (∂), 28, 352
Oren Patashnik, 417
period, 5
\perp (⊥), 347
personal computer, xxi
\Phi (Φ), 346
\phi (ϕ), 346
\Pi (Π), 346
\pi (π), 346
\pitchfork (⋔), 348
plain.fmt, 51

Craig Platt, 416
\pm (±), 350
pmatrix (subsidiary math environment), 18, 28
\pmod, 16
\pod, 16
point (font size), 8
Nico A. F. M. Poppelier, 416
\pounds (£ text symbol), 357
\Pr (Pr operator), 354
preamble of article, 34–35
\prec (≺), 347
\precapprox (⪷), 348
\preccurlyeq (≼), 348
\preceq (⪯), 347
\precnapprox (⪹), 349
\precneqq (⪵), 349
\precnsim (⋨), 349
\precsim (≾), 348
\prime (′), 352
proclamation, 35
invoking, 44
\prod (∏ large operator), 19, 354
product, 19
prohibited character / key, 5
\projlim (proj lim operator), 354
prompt, 54
\propto (∝), 347
\Psi (Ψ), 346
\psi (ψ), 346
pt (dimensional unit), 8
punctuation mark, 5

\qquad (space command), 19, 353, 358
\quad (space command), 17, 353, 358
question mark, 5
quotation mark, 5, 7
double quote, 5, 7
single quote, 5, 7

\r (˚ accent), 357
\rangle (⟩ math delimiter), 24, 353

\rceil (⌉ math delimiter), 353
\Re (ℜ), 352
\ref, 30, 31, 44
reference in article, 38, 44
references, 38
referencing
    bibliographic item, 45
    label, 30, 43, 44
return key, 5
\rfloor (⌋ math delimiter), 353
\rhd (▷), 350
\rho (ρ), 346
Richard Ribstein, 416
\right, 17, 23, 24, 27
right single quote, 5, 7
\right) ( ) math delimiter), 16, 24, 32
\Rightarrow (⇒), 351
\rightarrow (→, also \to), 12, 351
\rightarrowtail (↣), 351
\rightharpoondown (⇁), 351
\rightharpoonup (⇀), 351
\rightleftarrows (⇄), 351
\rightleftharpoons (⇌), 351
\rightrightarrows (⇉), 351
\rightsquigarrow (⇝), 351
\rightthreetimes (⋌), 350
\risingdotseq (≓), 348
\rmfamily, 358
Denis Roegel, 417
root, 12, 19
    nth, 19
    square, 12, 19
row / line separator (\\), 18, 31, 32
\Rrightarrow (⇛), 351
\rtimes (⋊), 350
Kevin Ruland, 417

\S (§ math symbol), 352
\S (§ text symbol), 357
sampart (sample article), xx–xxiii, 33, 49, 50
sampart2 (sample article), 50, 56
Merry Obrecht Sawdey, 418
Thomas R. Scavo, 417, 418
Rainer Schöpf, xviii
Peter Schmitt, 417
\scriptsize, 359
\scshape, 358
\searrow (↘), 351
\sec (sec operator), 354
section, 44
\section, 44
sectioning of article, 43
    paragraph, 44
    section, 44
    subparagraph, 44
    subsection, 44
    subsubsection, 44
\setminus (∖), 350
\sffamily, 358
\sharp (♯), 352
\shortmid (∣), 348
\shortparallel (∥), 348
\show, 54
Nandor Sieben, 417
\Sigma (Σ), 346
\sigma (σ), 346
\sim (∼), 347
\simeq (≃), 347
simple align, 31
\sin (sin operator), 17, 354
sine, 17, 354
single quote, 5, 7
\sinh (sinh operator), 354
\slshape, 358
\SMALL, 359
\Small, 359
\small, 359
\smallfrown (⌢), 348
\smallint (∫), 352
\smallsetminus (∖), 350
\smallsmile (⌣), 348
\smile (⌣), 347
source file, xx, 3, 5–7, 9, 11, 22, 30,

44, 46, 48, 51, 54
space
key, 5
rules
in text, 7
vertical, 10
spacebar, 5
\spadesuit (♠), 352
\spbreve (˘ math accent), 355
\spcheck (ˇ math accent), 355
\spdddot (⃛ math accent), 355
\spddot (¨ math accent), 355
\spdot (˙ math accent), 355
special key / character, 5, 356
\sphat (ˆ math accent), 355
\sphericalangle (∢), 352
Michael Spivak, xviii
\sptilde (˜ math accent), 355
\sqcap (⊓), 350
\sqcup (⊔), 350
\sqrt ($\sqrt{}$), 12, 19
\sqsubset (⊏), 347
\sqsubseteq (⊑), 347
\sqsupset (⊐), 347
\sqsupseteq (⊒), 347
\square (□), 352
square root, 12, 19
\SS (SS), 357
\ss (ß), 357
\star (⋆), 350
subscript, 15
\Subset (⋐), 348
\subset (⊂), 347
\subseteq (⊆), 347
\subseteqq (⫅), 348
\subsetneq (⊊), 349
\subsetneqq (⫋), 349
subsidiary math environment, 33
bmatrix, 18
cases, 33
matrix, 18
pmatrix, 18, 28
Vmatrix, 18, 26
vmatrix, 18, 26
\succ (≻), 347
\succapprox (⪸), 348
\succcurlyeq (≽), 348
\succeq (⪰), 347
\succnapprox (⪺), 349
\succneqq (⪶), 349
\succnsim (⋩), 349
\succsim (≿), 348
sum, 19, 20, 27
\sum ($\sum$ large operator), 19, 20, 27, 354
\sup (sup operator), 354
superscript, 15
\Supset (⋑), 348
\supset (⊃), 347
\supseteq (⊇), 347
\supseteqq (⫆), 348
\supsetneq (⊋), 349
\supsetneqq (⫌), 349
\surd ($\surd$), 352
\swarrow (↙), 351
symbolic referencing, 30

\t (͡ accent), 357
tab character / key, 5, 7
\tag, 30
tagging equations, 31
\tan (tan operator), 354
\tanh (tanh operator), 354
\tau (τ), 346
testart.tex, 23
TEX, xx, xxi, 9, 51
TEX log, 54, 55
text, 3, 4
emphasized, 9
in math, 19
\text, 19, 23, 54
text environment, 9
flush right, 4, 9
text symbol, 356–357
\textbf, 9, 358

\textbullet (• text symbol), 357
\textcircled (◯ text symbol), 357
\textit, 358
\textmd, 358
\textperiodcentered (· text symbol), 357
\textrm, 358
\textsc, 358
\textsf, 358
\textsl, 358
\textstyle, 25
\texttt, 358
\textup, 358
\textvisiblespace (␣ text symbol), 357
thebibliography (text environment), 38
\therefore (∴), 348
\Theta (Θ), 346
\theta (θ), 346
\thickapprox (≈), 348
\thicksim (∼), 348
\thickspace (thick space, also \;), 353, 358
\thinspace (thin space, also \,), 4, 353, 358
Paul Thompson, 417
\Tilde (˜ math accent), 355
\tilde (˜ math accent), 16, 355
\times (×), 15, 350
\Tiny, 359
\tiny, 359
\title, 42, 43
title page, 35
\to (→, also \rightarrow), 12, 351
Ronald M. Tol, 417
\top (⊤), 352
top matter, 35, 36, 41–43
\triangle (△), 352
\triangledown (▽), 352
\triangleleft (◁), 350
\trianglelefteq (⊴), 348
\triangleq (≜), 348
\triangleright (▷), 350
\trianglerighteq (⊵), 348
\ttfamily, 358
\twoheadleftarrow (↞), 351
\twoheadrightarrow (↠), 351

\u (˘ accent), 357
\underset, 25
\unlhd (⊴), 350
\unrhd (⊵), 350
\Uparrow (⇑ math delimiter), 353
\Uparrow (⇑), 351
\uparrow (↑ math delimiter), 353
\uparrow (↑), 351
\Updownarrow (⇕ math delimiter), 353
\Updownarrow (⇕), 351
\updownarrow (↕ math delimiter), 353
\updownarrow (↕), 351
\upharpoonleft (↿), 351
\upharpoonright (↾), 351
\uplus (⊎), 350
\upshape, 358
\Upsilon (Υ), 346
\upsilon (υ), 346
\upuparrows (⇈), 351
\usepackage, 12, 15, 20

\v (ˇ accent), 357
\varDelta (Δ), 346
\varepsilon (ε), 346
\varGamma (Γ), 346
\varinjlim ($\varinjlim$ operator)), 354
\varkappa (ϰ), 346
\varLambda (Λ), 346, 348
\varliminf ($\varliminf$ operator)), 354
\varlimsup ($\varlimsup$ operator)), 354
\varnothing (∅), 352
\varOmega (Ω), 346
\varPhi (Φ), 346
\varphi (φ), 28, 346
\varPi (Π), 346
\varpi (ϖ), 346

\varprojlim ($\varprojlim$ operator)), 354
\varpropto ($\varpropto$), 348
\varPsi ($\varPsi$), 346
\varrho (ϱ), 346
\varSigma ($\varSigma$), 346
\varsigma (ς), 346
\varsubsetneq ($\varsubsetneq$), 349
\varsubsetneqq ($\varsubsetneqq$), 349
\varsupsetneq ($\varsupsetneq$), 349
\varTheta ($\varTheta$), 346
\vartheta (ϑ), 346
\vartriangle ($\vartriangle$), 352
\vartriangleleft ($\vartriangleleft$), 348
\vartriangleright ($\vartriangleright$), 348
\varUpsilon ($\varUpsilon$), 346
\varXi ($\varXi$), 346
\Vdash ($\Vdash$), 348
\vDash ($\vDash$), 348
\vdash ($\vdash$), 347
\Vec ($\vec{}$ math accent), 355
\vec ($\vec{}$ math accent), 16, 355
\vee ($\vee$), 25, 350
\veebar ($\veebar$), 350
version number, 55
\Vert ($\Vert$ math symbol), 352
vertical space, 10
Vmatrix (subsidiary math environment), 18, 26
vmatrix (subsidiary math environment), 18, 26
\vspace, 10
\Vvdash ($\Vvdash$), 348

Ernst U. Wallenborn, 417
Doug Webb, 417
\wedge ($\wedge$), 350
\widehat ($\widehat{}$ math accent), 27, 355
\widetilde ($\widetilde{}$ math accent), 355
work directory, 4, 6, 7, 9, 11, 12, 20, 41, 42
World Wide Web, xxi
\wp ($\wp$), 352
\wr ($\wr$), 350

\Xi (Ξ), 346
\xi (ξ), 346
\xvarsupsetneqqx ($\supsetneqq$), 349

\zeta (ζ), 4, 346